



PART NUMBER: ANT1204F005R0915A

Features:

- Size: 12.2 x 4.0 x 1.6 mm
- Omni-directional Radiation
- · Tape & reel automatic mounting
- · Reflow process compatible
- RoHS compliant



Applications:

- Smart meter
- · Industrial remote control

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and Wede I laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



PART NUMBER: ANT1204F005R0915A

ELECTRICAL SPECIFICATIONS				
Centre Frequency	915 MHz			
Bandwidth	30 MHz (Typ.)			
Return Loss	10 dB Min			
Polarization	Linear			
Azimuth Beamwidth	Omni-directional			
Peak Gain	1.59 dBi(Typ.)			
Impedance	50 Ω			
Operating Temperature	- 40~85 ℃			
Maximum Power	1 W			
Termination	Cu / Au (Environmentally-Friendly Leadless)			
Resistance to Soldering Heats	260°C , 10sec.			

NOTE

MECHANICAL DRAWING

	Dimension	Top View Side	e View
L (mm)	12.2 ±0.2		T -
W (mm)	4.0 ±0.2	T Comments	
T (mm)	1.6 ±0.2	W YAGEO8705	
		Bottom View	_
TERMINATION	<u>Function</u>		
S1	Feeding Point		
S2	Soldering Point		
		S1 S2	
		Antenna outlines	

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION


Dimension

^{1.} The specification is defined on Pulse evaluation board




PART NUMBER: ANT1204F005R0915A

REFERENCE DESIGN OF EVALUATION BOARD

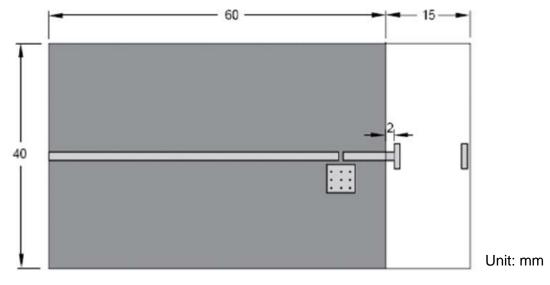

Outlook and dimension of evaluation board

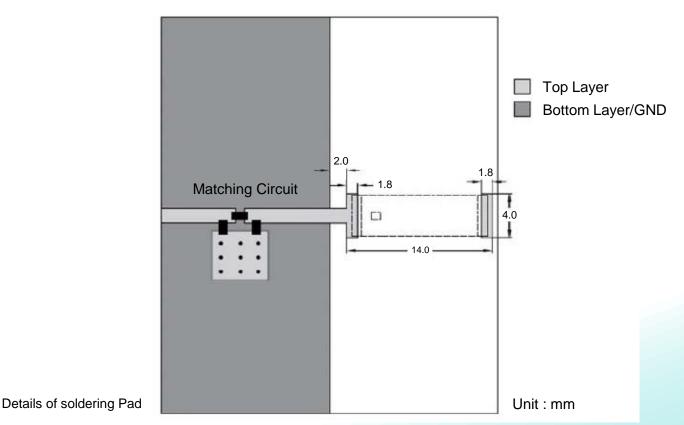


In the effort to improve our products, we reserve the right to make changes judged to be necessary.



PART NUMBER: ANT1204F005R0915A

ELECTRICAL PERFORMANCES


Return loss (dB)



Marker data

- 1. 870 MHz, -10dB
- 2. 915 MHz, -16.73dB
- 3. 926 MHz, -10dB

Evaluation board and XYZ direction

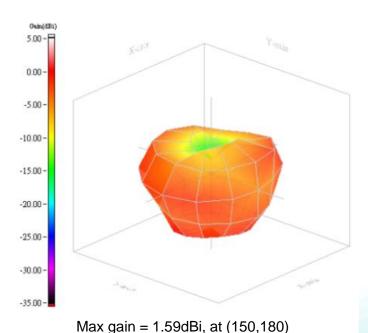

MEG (mean effective gain) = -3.56dBi Directivity (dB) = 4.57 Efficiency = -2.98dB, 50.30%

Radiation pattern

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



TECHNICAL DATA SHEET

Description: 1204 915MHz FR4 Chip Antenna

PART NUMBER: ANT1204F005R0915A

DEV	/101			CT	NOV
REV	11	UN	П	311	JRT

Revision	Date	Description
Version 1	Mar. 9, 2021	- New issue for Pulse version.