








RF DIFFERENTIAL SPLITTER

For RF Applications in Coaxial Cable Products and Distribution Equipment



-  Differential inputs and differential outputs
-  Optimized for use with differential amplifiers
-  Operating bandwidth: 96MHz to 864MHz
-  Ideal for set top box applications
-  Good flatness
-  Good Isolation




Electrical Specifications @ 25°C

Standard ¹ Part Number	RoHS-6 ¹ Compliant Part No.	Frequency ² (MHz)	Z (Ω)	Insertion Loss (Above 3dB)		Flatness 96-864MHz (dB TYP/MAX)	Isolation 96-864MHz (dB TYP/MIN)	Return Loss 96-864MHz (dB MIN)
				96-400MHz (dB TYP/MAX)	400-864MHz (dB TYP/MAX)			
C4020	C4020NL	96-864	75	1.1/1.8	1.9/3.0	1.0/1.5	25/20	9

Notes: 1. Optional Tape & Reel packaging available by adding a "T" suffix to the part number (ex: C4020T). Specifications apply to both Port 1 and Port 2.
 2. Additional operating frequencies are available. Please contact Pulse Applications Engineering for further details.


Mechanical

C4020/C4020NL

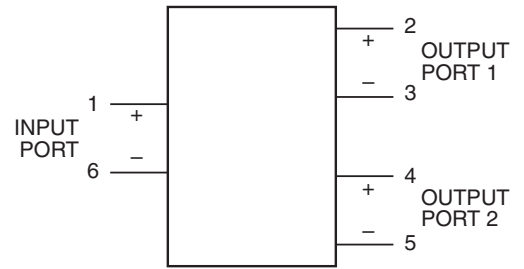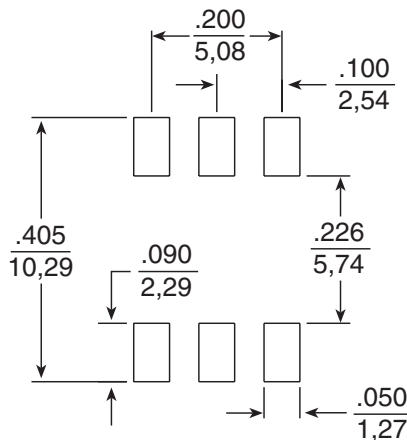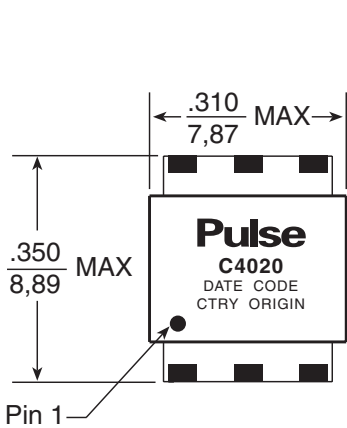

BLOCK DIAGRAM

SUGGESTED PAD LAYOUT

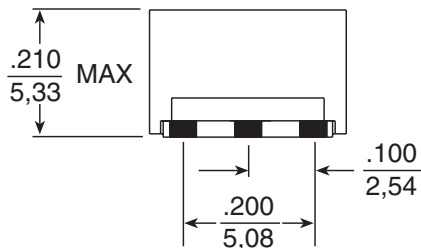

Weight 0.40 grams

Tape & Reel850/reel

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.005}{0,13}$

RF DIFFERENTIAL SPLITTER

For RF Applications in Coaxial Cable Products and Distribution Equipment




Application Notes


A. Materials used in the products are UL94-V0 recognized. Products meet requirements of IEC 695-2-2 (Needle Flame Test).

Tape and Reel Specifications


C4020/C4020NL

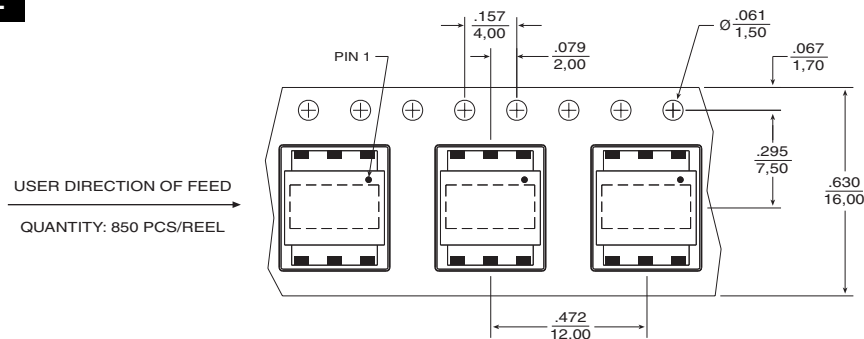

C4020 / C4020NL - Port 1 Insertion Loss

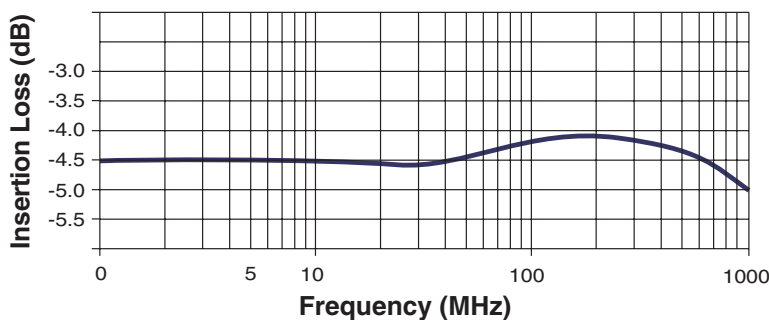

C4020 / C4020NL - Port 2 Insertion Loss

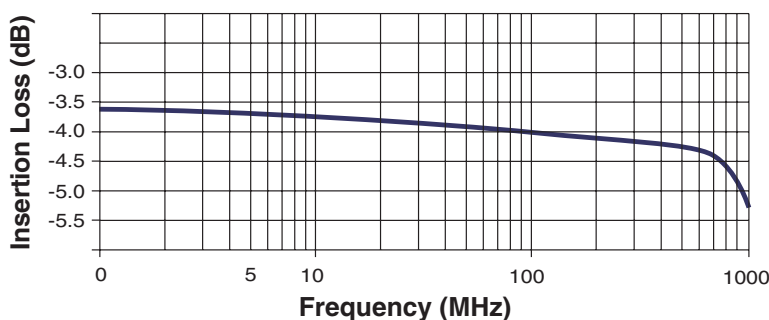

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

Pulse Northern Europe

3 Huxley Road
Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

Pulse Southern Europe

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

Pulse China Headquarters

No. 1
Industrial District
Changan, Dongguan
China
TEL: 86 769 5538070
FAX: 86 769 5538870

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Road
Shanghai 200233
China
TEL: 86 21 54643211/2
FAX: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Road
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
TEL: 886 3 4641811
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.
© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.