

Description: 2012 Diplexer

PART NUMBER: DPX2012LRGYR2558A

Features:

Applications:

WLAN

- Compact size
- RoHS compliant



Net weigh/pcs (g): 0.00919

ELECTRICAL SPECIFICATIONS

Low-Band Item Frequency Range (MHz) Min. Max. Тур. Insertion loss (dB) 2400~2500 2.4 -12 Return loss (dB) 2400~2500 --824~915 30 _ _ 1545~1605 25 _ _ 1710~1910 25 _ _ Attenuation (dB) 2170 12 --4800~5000 30 --7200~7500 26 --

High-Band

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Insertion loss (dB)	5150~5850	-	-	1.2
Return loss (dB)	5150~5850	12	-	-
Attonuction (dP)	2400~2500	25	-	-
Attenuation (dB)	10300~11700	20	-	-

Common

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Return loss (dB)	2400~2500	12	-	-
	5150~5850	12	-	-

Operating Temperature Range : -40~85°C

Power Capacity : 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998 1



Outline

а

w

TECHNICAL DATA SHEET

Description: 2012 Diplexer

PART NUMBER: DPX2012LRGYR2558A

MECHANICAL DIMENSION

Dimension


L	W	Т	а
2.00±0.15	1.25±0.15	0.70 max.	0.30±0.20
b	С	р	
0.30±0.20	0.20±0.20	0.65±0.20	

NOTE : Dimensions in mm.

Termination Top View						
3	2					
4	5	6				

Terminal name	Function		
1	High band		
2	GND		
3	Low band		
4	GND		
5	Common		
6	GND		


Reference design of EVB



т

С

р



Unit : mm

 \bigcirc Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



2


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



Description: 2012 Diplexer


PART NUMBER: DPX2012LRGYR2558A


MEASURING DIAGRAM



Test Instrument : Agilent N5230A Network Analyzer or equivalent.

ELECTRICAL PERFORMANCES

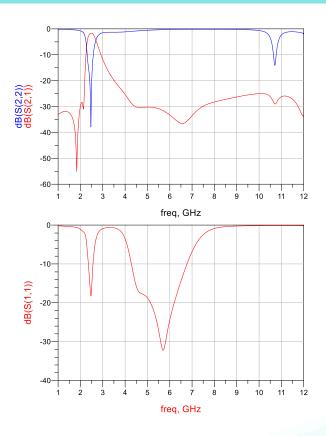



In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.





Description: 2012 Diplexer

PART NUMBER: DPX2012LRGYR2558A

PACKING SPECIFICATION


Peel-off force



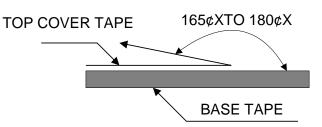

The force for peeling of cover tape is 10 grams in the arrow direction.

Dimension (Unit: mm)




ТҮРЕ	A	В	С	D	E	F
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

4

RoHS

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

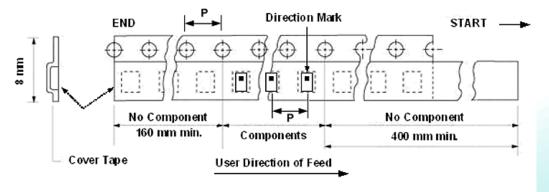

P= 4 mm

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

Е

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



Description: 2012 Diplexer

PART NUMBER: DPX2012LRGYR2558A

REVISION HISTORYRevisionDateDescriptionPreliminarySep.19, 2023- New issueVersion 1Oct. 15, 2024- Update to version.Version 2Nov. 05, 2024- Update to version.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.