

Series: GNSS Active Antenna

TECHNICAL DATA SHEET

Description: 26dBi GNSS Antenna Adhesive

mount, SMA

PART NUMBER: GNSSCGMSMA



Features:

- Frequency 1559-1610MHz
- LNA Gain 26dB
- Current consumption 9mA
- High rejection filters
- Cable 5m RG-174, SMA-Male
- IP65
- Mounting with adhesive tape

Applications:

- GPS, GLONASS, BeiDou, Compass, Galileo satellite navigation system
- Asset tracking, Fleet management, IoT, M2M
- Satellite navigation active antenna

All dimensions are in mm / inches

Issue: 1914

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: 26dBi GNSS Antenna Adhesive

mount, SMA

PART NUMBER: GNSSCGMSMA

Series: GNSS Active Antenna

ELECTRICAL SPECIFICATIONS

Antenna Radiator Type		Ceramic chip
Frequency		1559-1610MHz
Nominal Impedance		$50~\Omega$
VSWR**		2.5:1
Radiation Pattern		Omni
Gain*		-2 / -1.5 / -2.5dBi
Efficiency*		35 / 40 / 35%
Polarization		Linear / Vertical
LNA gain		$26 \text{ dB} \pm 2 \text{ dB}$
Noise Figure		2.5 (cascade) dB
Current		$9 \text{ mA} \pm 2 \text{ mA}$
Vdc		3-5Vdc
LNA and filter attenuation		
	@1500MHz	0dB
	@1640MHz	0dB
Filter attenuation		
	10-925MHz	50dB
	1427-1463MHz	32dB
	1710-1980MHz	40dB
	2400-2570MHz	30dB

2570-3000MHz

* Measured with 4 inch cables

** Measured with 3 feet cables

27dB



Series: GNSS Active Antenna

TECHNICAL DATA SHEET

Description: 26dBi GNSS Antenna Adhesive

mount, SMA

PART NUMBER: GNSSCGMSMA

MECHANICAL SPECIFICATIONS

Antenna size 53 x 29.9 x 6.6mm

Weight 85.3g

Antenna Color / Material PC+ABS/Black

Connector type SMA-Male

Cable type RG-174

Cable length 5000mm

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -40 ~ 85° C

Storage Temperature -40 ~ 85° C

Ingress Protection IP65
RoHS Compliant Yes

ASSEMBLY METHOD

Mounting with Adhesive tape.

Tape is provided with antenna as separate piece.




Description: 26dBi GNSS Antenna Adhesive

mount, SMA

PART NUMBER: GNSSCGMSMA

Series: GNSS Active Antenna

MECHANICAL DRAWING

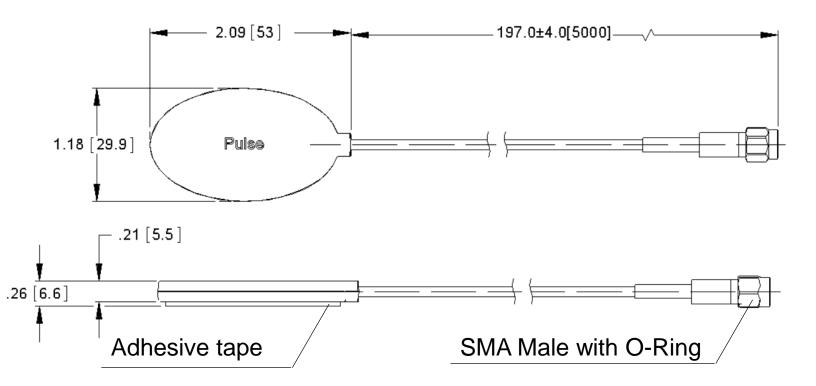



Description: 26dBi GNSS Antenna Adhesive


mount, SMA

PART NUMBER: GNSSCGMSMA

Series: GNSS Active Antenna

CHARTS

VSWR vs Frequency

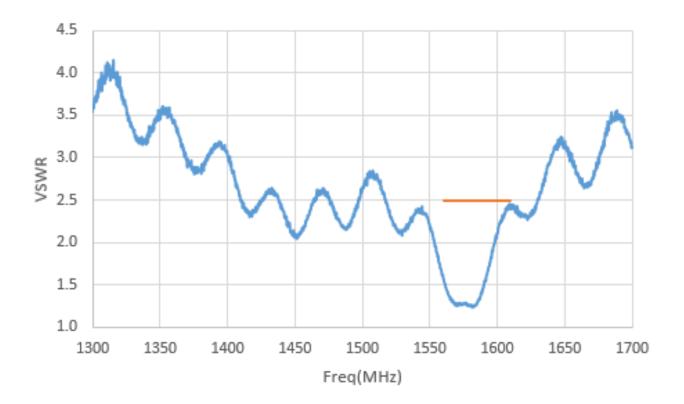





Description: 26dBi GNSS Antenna Adhesive


mount, SMA

PART NUMBER: GNSSCGMSMA


Series: GNSS Active Antenna

CHARTS

Antenna element Peak Gain (Without LNA)

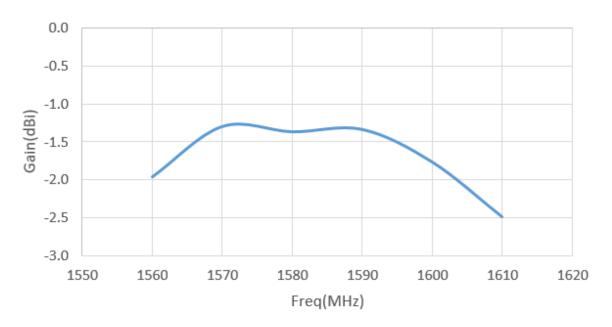

Antenna element Radiation Efficiency (Without LNA)

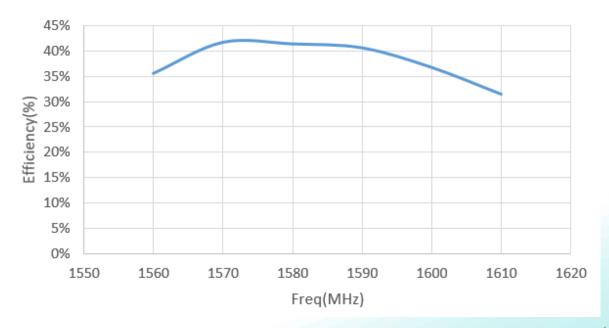

Issue: 1914



Description: 26dBi GNSS Antenna Adhesive


mount, SMA


PART NUMBER: GNSSCGMSMA

Series: GNSS Active Antenna

CHARTS

LNA Gain and out-of-band rejection

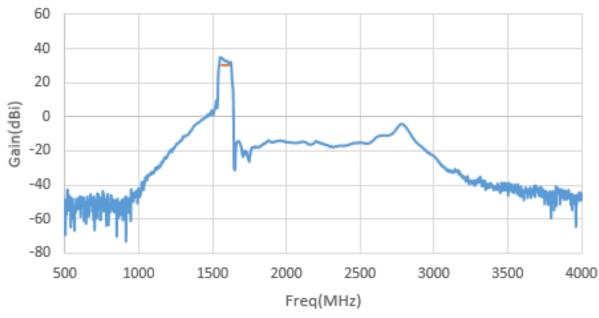

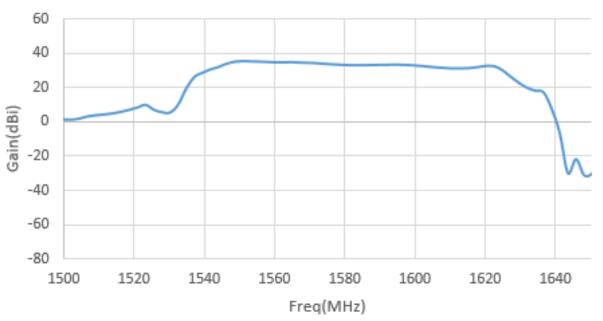







Description: 26dBi GNSS Antenna Adhesive


mount, SMA


PART NUMBER: GNSSCGMSMA


Series: GNSS Active Antenna

CHARTS

Radiation Pattern 2D, Antenna element without LNA

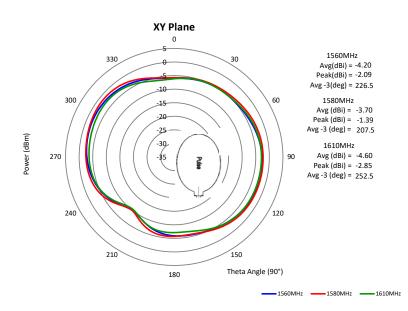

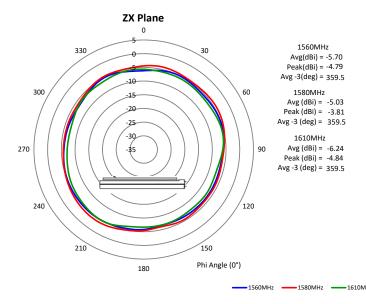

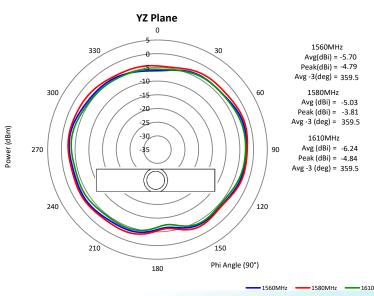

Issue: 1914



Series: GNSS Active Antenna

TECHNICAL DATA SHEET

Description: 26dBi GNSS Antenna Adhesive

mount, SMA

PART NUMBER: GNSSCGMSMA

PACKAGING

1pcs/ PE bag 50pcs/ Box

