

## Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

#### PART NUMBER: W3136



## Features:

- 860-930MHz
- Impedance 50 Ohm
- Plastic support helical antenna
- Length 29.5mm,
- Gain 2dBi
- SMD Mounting on PCB
- RoHS Compliant


# **Applications:**

- 868MHz and 915MHz ISM Band Systems
- IoT systems
- Metering, Automation
- Security, surveillance
- Remote controls, toys

#### All dimensions are in mm / inches

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



For more information: Pulse Worldwide Headquarters

15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



1





# Series: SMD Helical Antenna

PART NUMBER: W3136

#### **ELECTRICAL SPECIFICATIONS**

Antenna Type	Helical monopole
Frequency	860-930MHz
Nominal Impedance	50 Ω
VSWR	Max 2.5
Radiation Pattern	Omni
Gain	2 dBi
Efficiency	65%
Polarization	Linear
Power Withstanding	2W

MECHANICAL SPECIFICATIONS					
Overall Length	29.5mm				
Weight	2.52g				
Antenna Color / Material	White				
Fix system	SMD+Glue				
Recommended Glue	Resinlab EP1320LV Black				
Solder Paste Thickness	Min 0.15mm				
MSL	3				
ENVIRONMENTAL SPECIFICATIONS					
Operating Temperature	-40° C~+85° C				
Storage Temperature	-40° C~+85° C				
RoHS Compliant	Yes				

#### **OTHER SPECIFICATIONS**

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION




2





# Series: SMD Helical Antenna

PART NUMBER: W3136

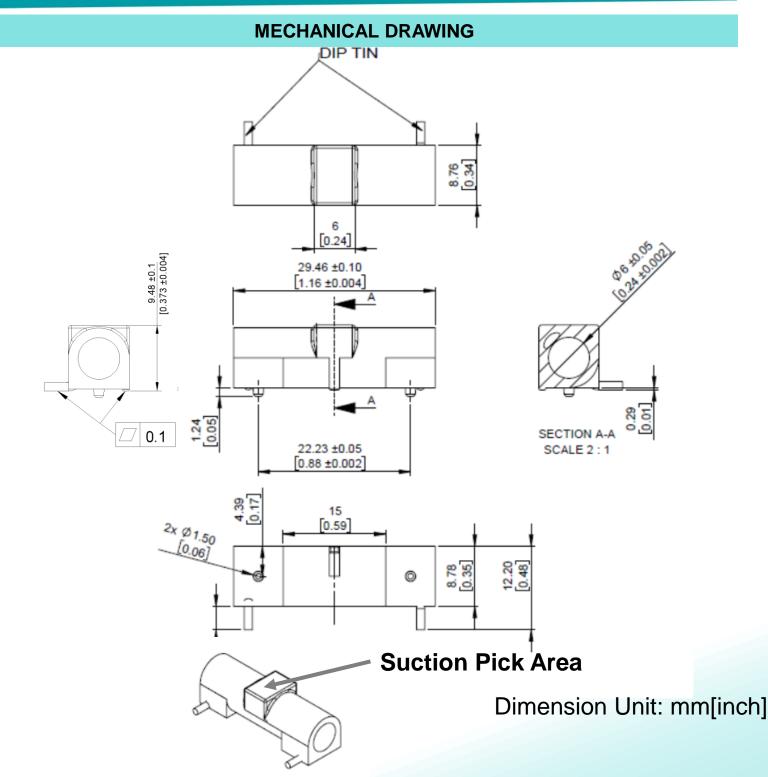

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

ROHS 3






# Series: SMD Helical Antenna

PART NUMBER: W3136

#### FIX SYSTEM RECOMMENDATION

# Fix system

- 1. SMD process
- 2. Solder paste thickness: minimum 0.15mm
- 3. Glue is required, Recommended Glue: Resinlab EP1320LV Black, usage and position see below recommended area.

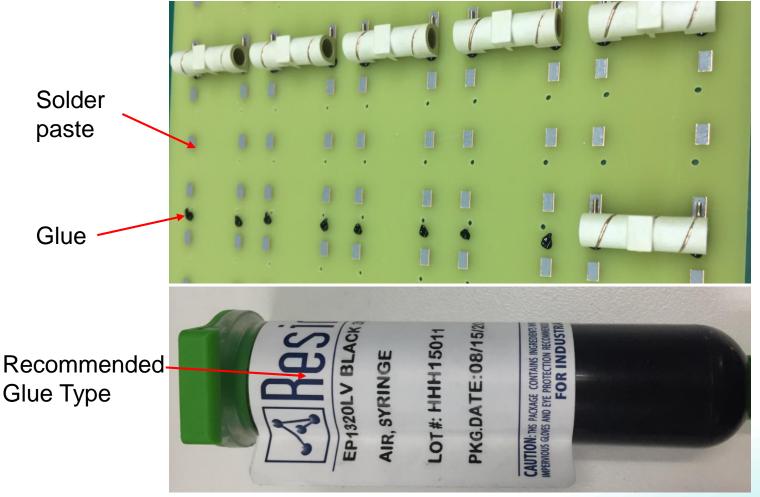

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION








Description: 860-930MHz Embedded Helical Antenna

#### PART NUMBER: W3136

#### FIX SYSTEM RECOMMENDATION

Fix system

1. Glue position on PCB for recommendation

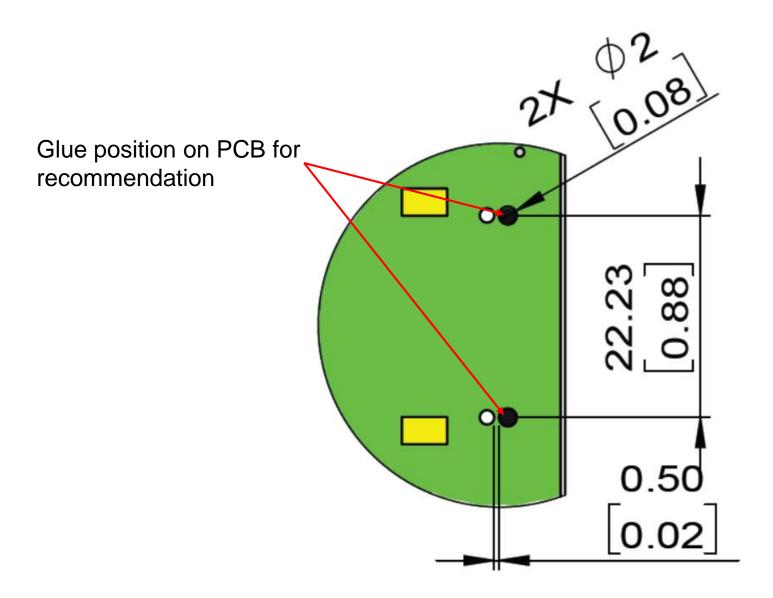

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION




5



Description: 860-930MHz Embedded Helical Antenna

# Series: SMD Helical Antenna

PART NUMBER: W3136

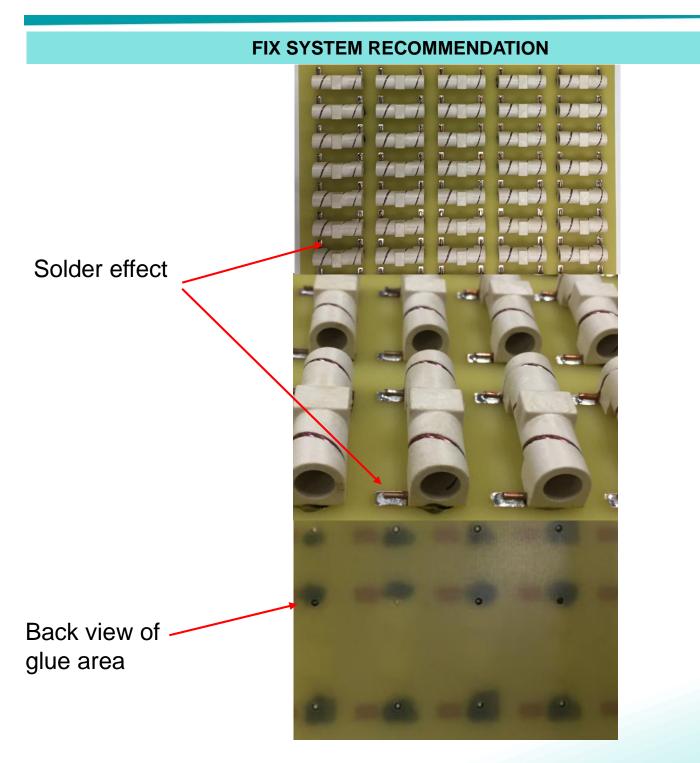

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



6




Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

#### PART NUMBER: W3136

### **TEST SETUP**

# PWB Layout for W3136 SMD Helical Antenna

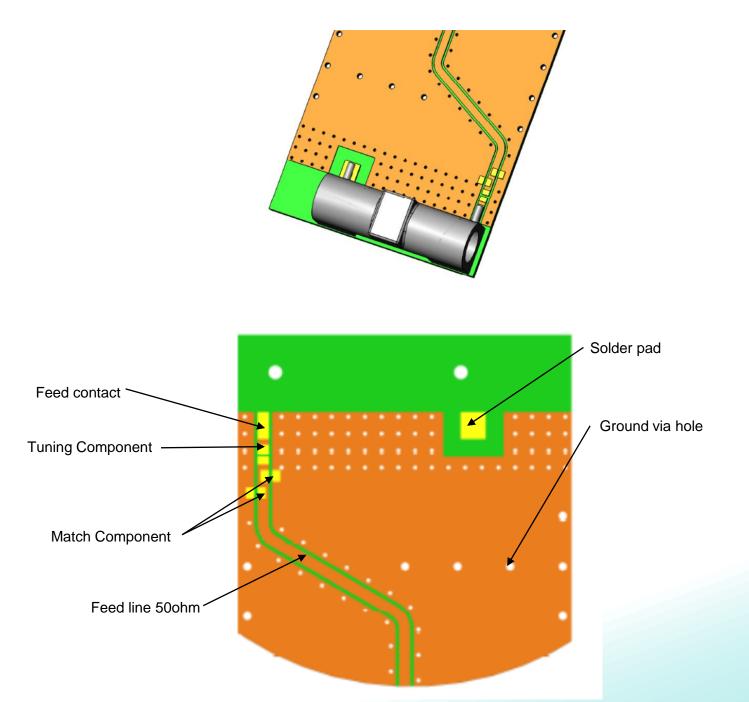

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION








Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

### PART NUMBER: W3136

#### **TEST SETUP**

PWB ground clearance area (Top):40x9.5mm PWB ground clearance area (Bottom):40x9.5mm

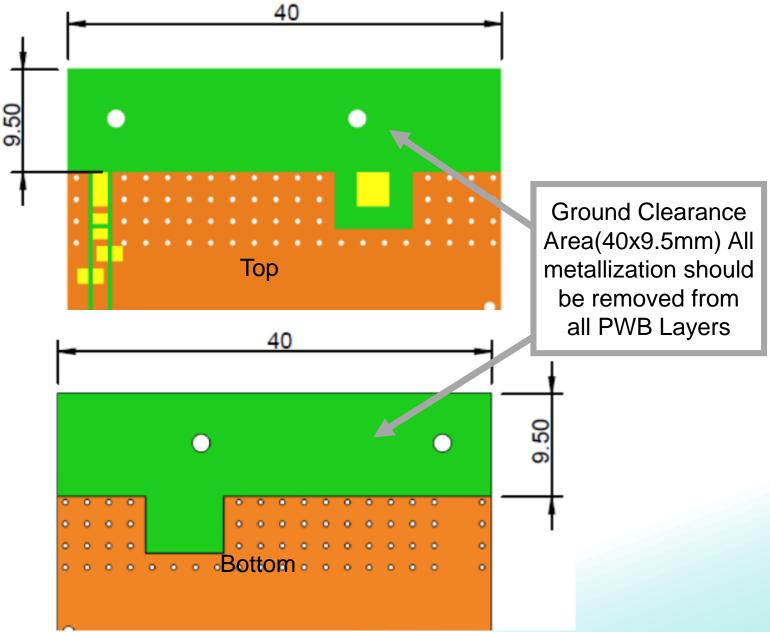

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Pulse LARSEN Antennas


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

### PART NUMBER: W3136

### **TEST SETUP**

PWB Pad dimension in top copper

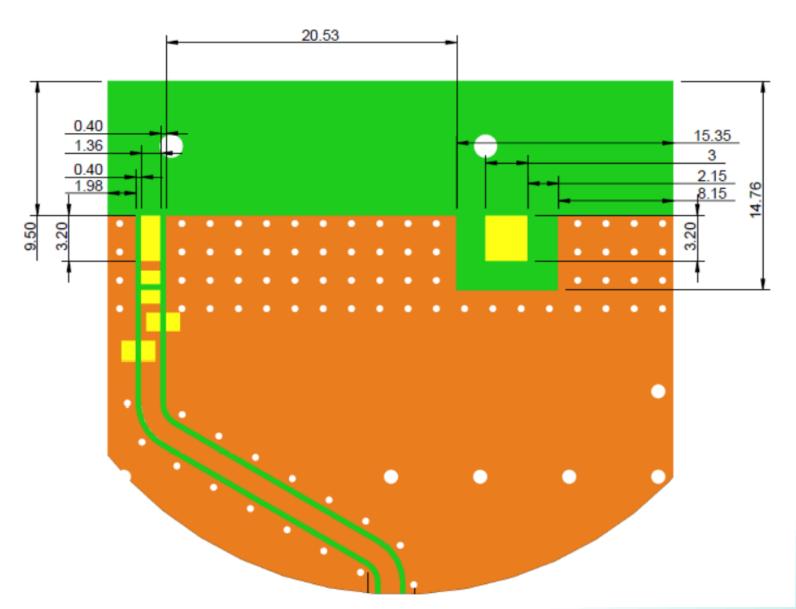

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



9






**Series: SMD Helical Antenna** 


Description: 860-930MHz Embedded Helical Antenna

### PART NUMBER: W3136

### **TEST SETUP**

PWB Layout, Pulse PWB size:121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

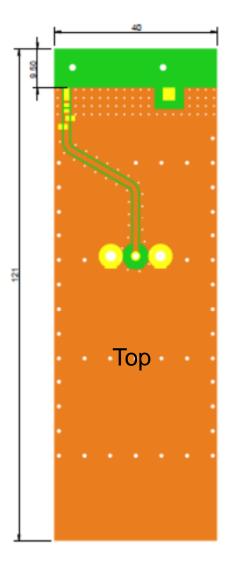

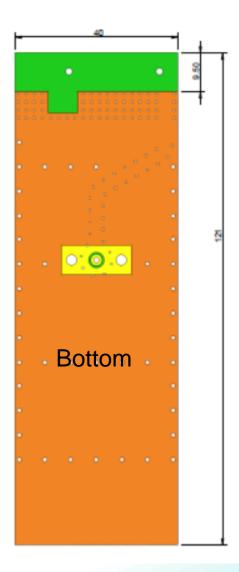

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






# Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

#### PART NUMBER: W3136

### **TEST SETUP**

PWB Layout, Pulse PWB size:121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

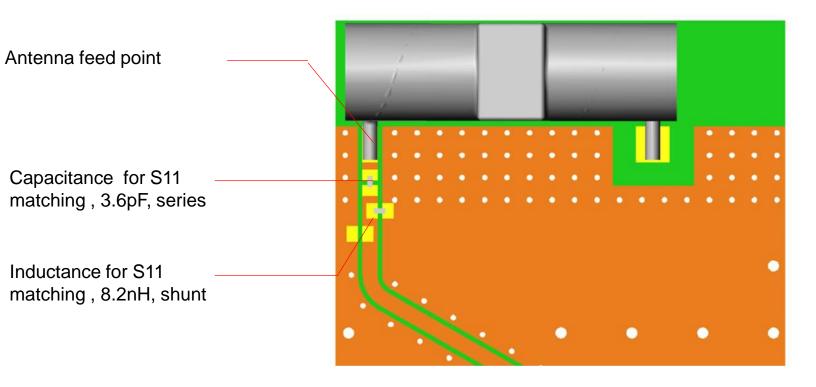

Note : Exact matching and tuning components value depend on application , board size ,cover etc.



In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

Issue: 1943




Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

#### PART NUMBER: W3136

### CHARTS

Measured on the 121x40mm test board with tuning and matching circuit

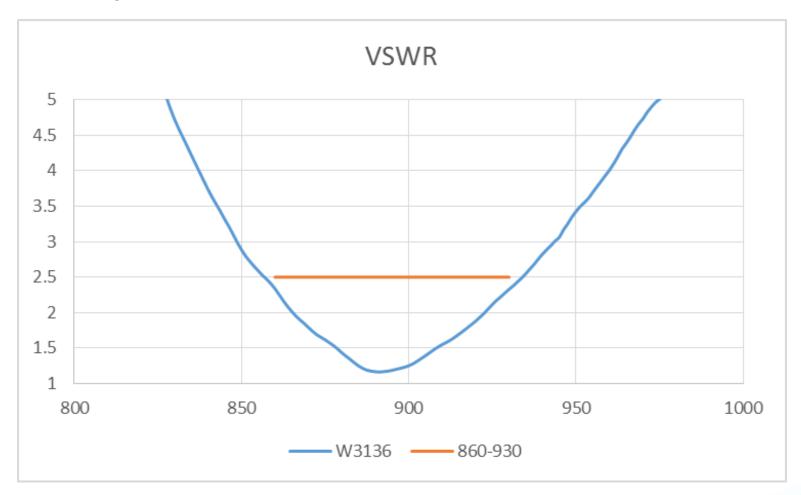

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

ROHS 12






# Series: SMD Helical Antenna

PART NUMBER: W3136

### **TEST SETUP**

Measured on the 121x40mm test board with tuning and matching circuit.

Test in PSU China Chamber.

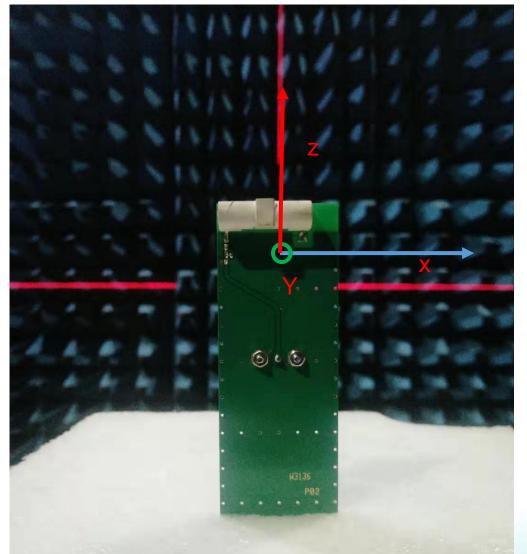

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 860-930MHz Embedded Helical Antenna

# Series: SMD Helical Antenna

PART NUMBER: W3136

### CHARTS

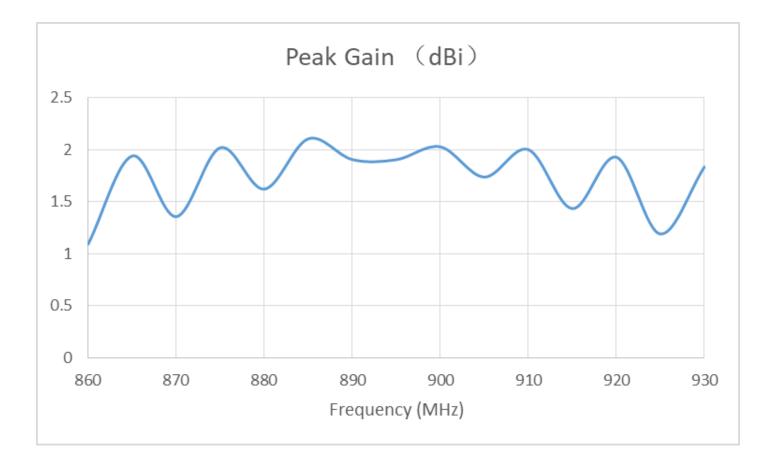

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

ROHS 14




Description: 860-930MHz Embedded Helical Antenna

# Series: SMD Helical Antenna

PART NUMBER: W3136

### CHARTS

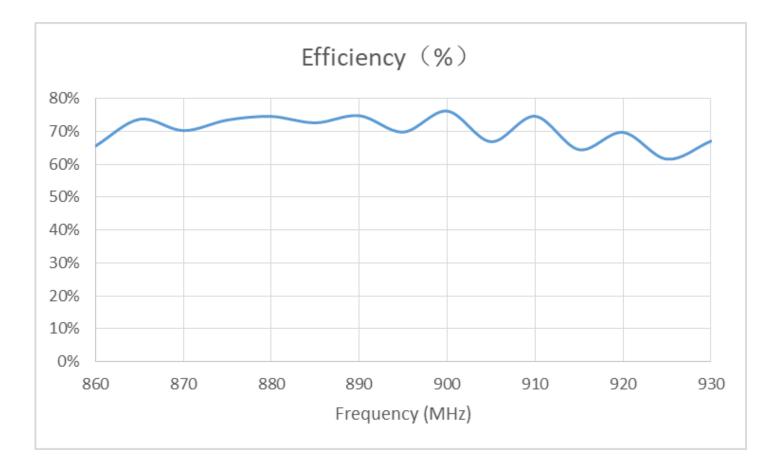

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

ROHS 15




Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

#### PART NUMBER: W3136

### **CHARTS**

# Typical radiation pattern in free space

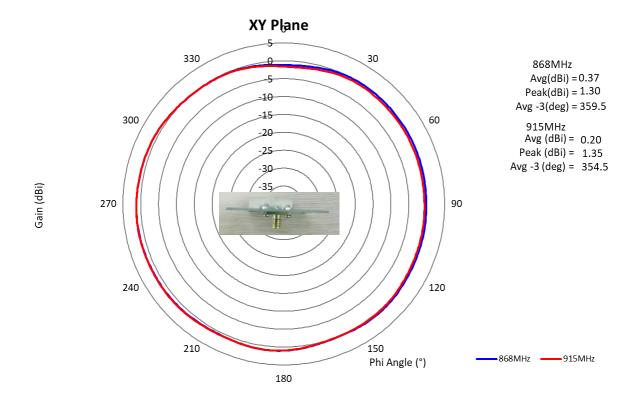

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

### **CHARTS**

# Typical radiation pattern in free space

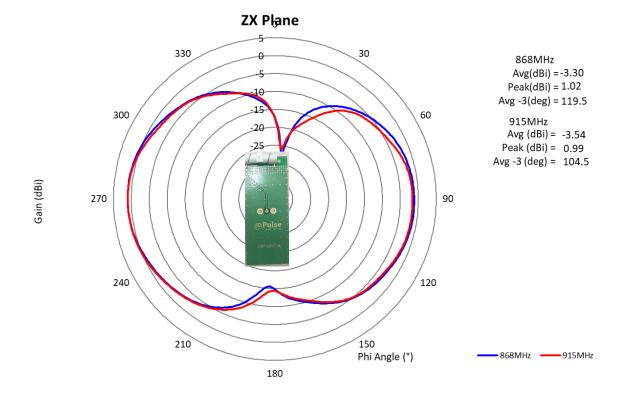

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



17




Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

#### PART NUMBER: W3136

#### **CHARTS**

# Typical radiation pattern in free space

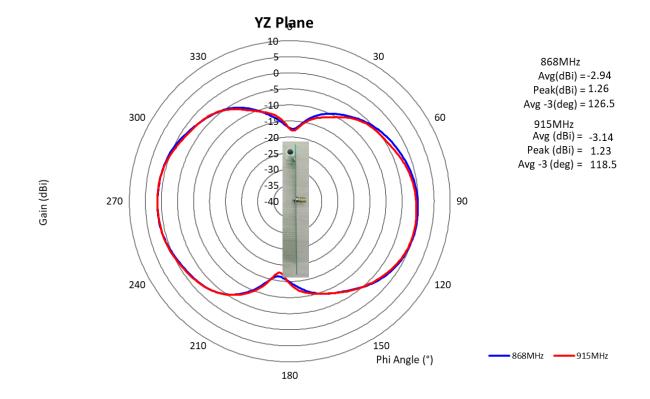

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

#### PART NUMBER: W3136

#### **Recommendation for reflow soldering process**

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 °C for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

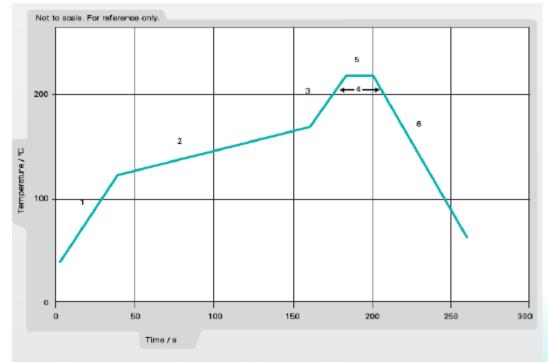


Figure 1. Minimum temperature profile recommendation for reflow soldering process

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





# Series: SMD Helical Antenna

PART NUMBER: W3136

### **Recommendation for reflow soldering process**

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
Б	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 ℃ for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

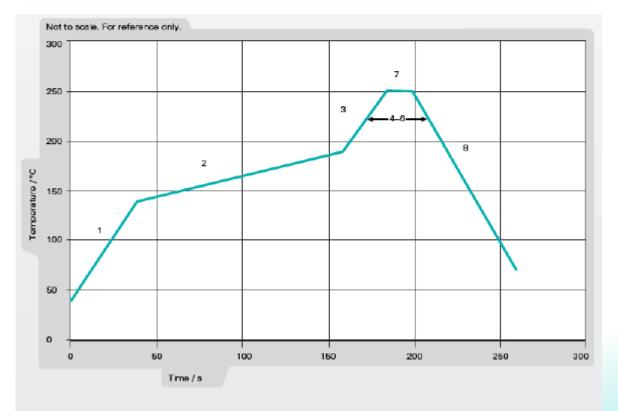


Figure 2. Maximum temperature profile recommendation for reflow soldering process

#### Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION


ROHS 20



# Series: SMD Helical Antenna

PART NUMBER: W3136

### PACKAGING

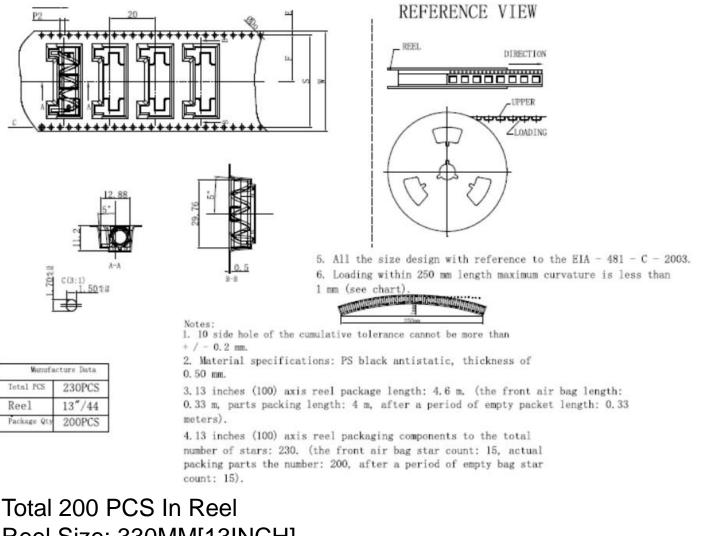

# Reel Size: 330MM[13INCH] Total 2 PCS Reel In Package Box Package Box Size:350x350x120mm

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

