

**Description**: 2.4/5GHz Dual Band Pigtail PCB Dipole

PART NUMBER: W3513

**Series:** Internal PCB antenna



## Features:

- Low profile
- · Omni directional gain in XY-plane
- Size W x L x H (16 x 70 x 0.9 mm)
- Antenna feed cable length: 250mm (total) / 212mm (from radiator edge)
- Antenna feed cable: 1.13mm OD with U.FL compatible connector
- · Lead free materials
- RoHS Compliant Product

# **Applications:**

- Access point routers 802.11n
- WLAN/WiFi 802.11a/b/g/n

All dimensions are in mm / inches

Issue: 1835

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: 2.4/5GHz Dual Band Pigtail PCB Dipole

Series: Internal PCB antenna

PART NUMBER: W3513

## **ELECTRICAL SPECIFICATIONS**

Antenna Type PCB Dipole

Frequency 2.4-2.5G&4.9-5.9G

Nominal Impedance 50  $\Omega$  VSWR 2:1

Radiation Pattern Omni

Gain 2dBi

Efficiency(2.4-2.5G) >65% Efficiency(4.9-5.9G) >55%

Polarization Vertical

## **MECHANICAL SPECIFICATIONS**

Size W x L x H 16 x 70 x 0.9 mm

Weight 2.57g

Connector type U.FL compatible connector

Cable type Ø1.13mm Coaxial Cable, Black

Cable length 250mm

# **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature -40 to +85 ° C

Storage Temperature -40 to +85 ° C

RoHS Compliant Yes






Description: 2.4/5GHz Dual Band Pigtail PCB Dipole

Series: Internal PCB antenna

PART NUMBER: W3513

# **MECHANICAL DRAWING**

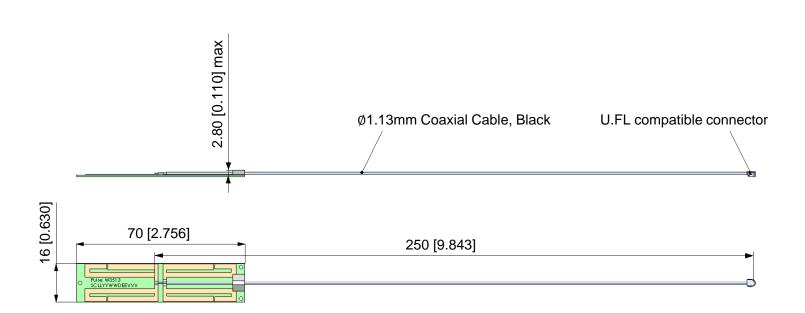






Description: 2.4/5GHz Dual Band Pigtail PCB Dipole

Series: Internal PCB antenna


PART NUMBER: W3513

## **TEST SETUP**



Test in free space.

# VSWR vs Frequency

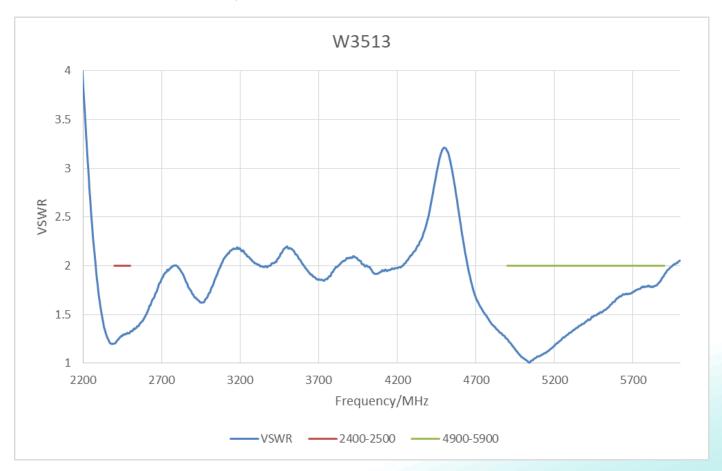

Issue: 1835

ROHS




Description: 2.4/5GHz Dual Band Pigtail PCB Dipole

Series: Internal PCB antenna


PART NUMBER: W3513

## **CHARTS**

# **Peaking Gain**

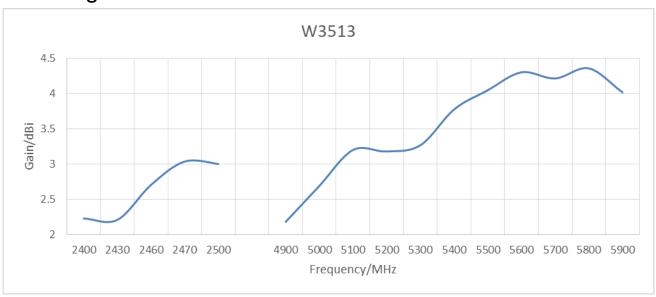

# Radiation Efficiency

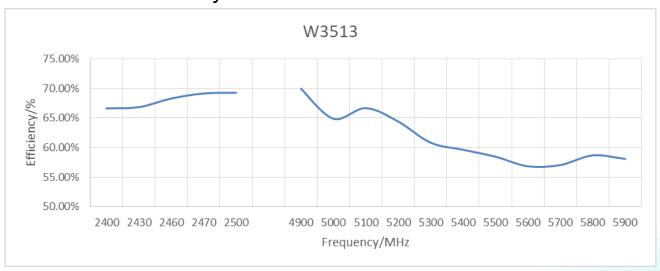




Description: 2.4/5GHz Dual Band Pigtail PCB Dipole


**Series:** Internal PCB antenna


**PART NUMBER: W3513** 

## **CHARTS**

# Radiation Pattern 2D(2.4G-2.5G)

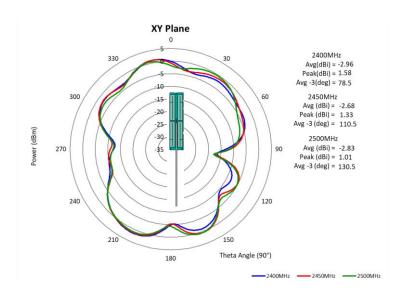

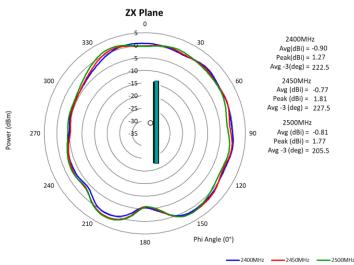

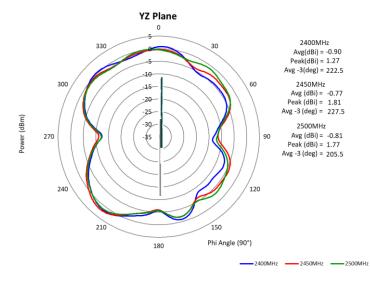




Description: 2.4/5GHz Dual Band Pigtail PCB Dipole


**Series:** Internal PCB antenna


**PART NUMBER: W3513** 

## **CHARTS**

# Radiation Pattern 2D (4.9G-5.9G)

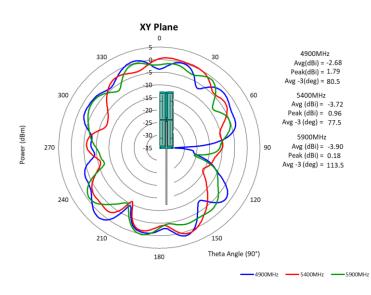

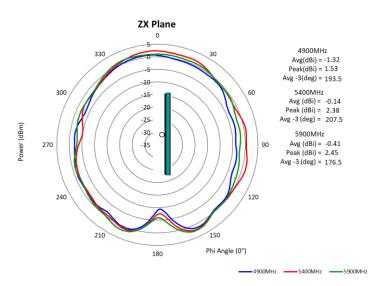

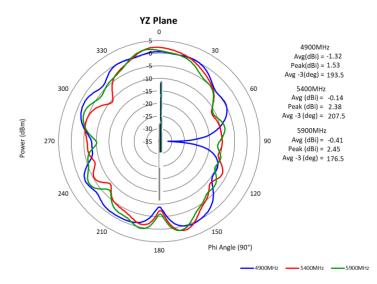



Description: 2.4/5GHz Dual Band Pigtail PCB Dipole

**Series:** Internal PCB antenna

PART NUMBER: W3513

# **CHARTS**

The VSWR when placed on different materials.

SETUP	Frequency/GHz	VSWR	
		Min	Max
Space	2.4-2.5	1.20	1.36
	4.9-5.9	1.00	1.90
ABS	2.4-2.5	1.36	1.55
	4.9-5.9	1.20	2.40
glass	2.4-2.5	1.43	1.57
	4.9-5.9	1.38	2.49
Metal_0cm	2.4-2.5	7.80	8.00
	4.9-5.9	5.16	6.00
Metal_0.5cm	2.4-2.5	4.75	4.96
	4.9-5.9	1.50	2.50
Metal_1cm	2.4-2.5	2.88	3.19
	4.9-5.9	1.4	2.21
Metal_2cm	2.4-2.5	1.69	2.03
	4.9-5.9	1.09	1.95
Metal_3cm	2.4-2.5	1.30	1.54
	4.9-5.9	1.10	1.79







Description: 2.4/5GHz Dual Band Pigtail PCB Dipole

Series: Internal PCB antenna

**PART NUMBER: W3513** 

## **CHARTS**

# Antenna is placed on ABS & glass.





When placed on ABS or glass, mainly difference is in high frequency band(4.9G-5.9G). Which performance will decline.

Issue: 1835






Description: 2.4/5GHz Dual Band Pigtail PCB Dipole

**Series:** Internal PCB antenna

PART NUMBER: W3513

## **CHARTS**

# Placed on metal with different distance.

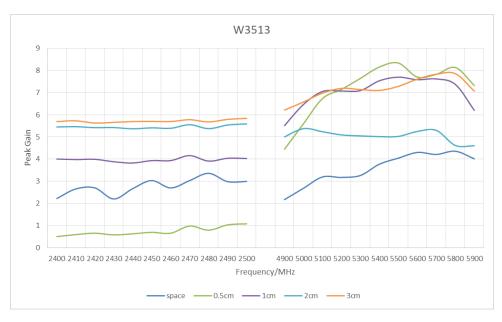



When the distance is 0.5-2cm, the metal mainly affect the performance of low frequency band(2.4G-2.5G). When the distance is above 2cm,the metal will have a little influence in two band.

Issue: 1835



Description: 2.4/5GHz Dual Band Pigtail PCB Dipole

**Series:** Internal PCB antenna

PART NUMBER: W3513

## **PACKAGING**

5 pcs per PE bag, 250 pcs per foam bag, 6 foam bags per box, 1500 pcs per box.

