

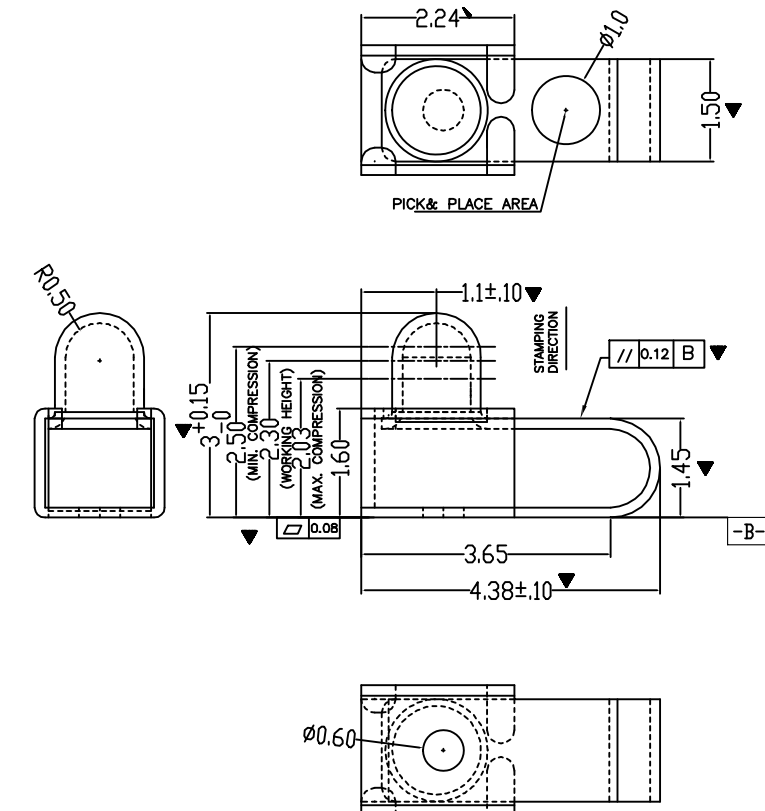


A		B	C	D	E	F	G
MD	Description	Please follow Pulse Limits for the hazardous substances (RoHS, halogens) in the document "Pulse Hazardous Substances (HS) Limits (RPG002-03)" and "Vendor Survey Questionnaire, Material Composition (LDM-SAF-L0040)".		Reliability Test Spec according to WIHS7.5.33 (Reliability Test Working Instruction) Default test standard is Test Standard A if no definition			
P2	Change the Logo						

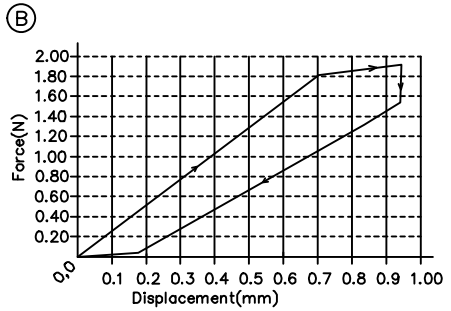

- NOTES:UNLESS OTHERWISE SPECIFIED
1. MATERIAL:COPPER ALLOY T=0.15mm
 2. NO CRACK APPEARS ON CONTACT BALL SHAPE.
 3. NO LINES APPEARS ON BENDING AREA.
 4. ALL UNSPECIFIED RADII TO BE 0.05 MAXIMUM .
 5. BURR:0.03MAX;CUMBER:1.5MM MAX/500MM; TWIST:20°/500MM.
 6. PRE-LOAD FORCE:0.40N ON CONTACT POINT
 7. WITH 25.4MM/MINUTE TEST SPEED COMPRESSED TO 0.7MM, KEEP THREE SECONDS, FORCE VALUE IS GREATER THAN 0.45N
 8. PLATING:3u"MIN GOLD PLATING ON CONTACT AREA, GOLD FLASH PLATING ON SOLDER AREA, 50u" MIN NICKEL PLATING OVER ALL
 9. MARKED WITH ▼ ARE THE KEY DIMENSIONS
 10. THE PRODUCT CONFORMS TO THE HSF.

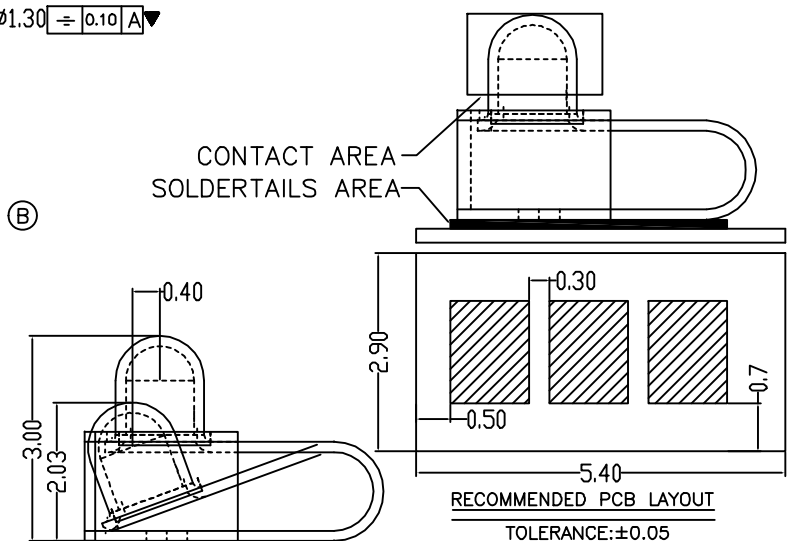

Confidential
This is a proprietary information of Pulse Suzhou.
No reproduction/copying is allowed without permission.

Functional Characteristics Key <Cpk requirement : Cpk>	
●	Process Capability Studies required< total pcs >
●	Ongoing Statistical Process Control Required < total pcs >
●	Critical dimension need to be measured, no CPK requirement < total pcs >

PULSE (SUZHOU) WIRELESS PRODUCTS CO.LTD.		THIRD ANGLE PROJECTION		SHEET NUMBER		1 / 1			
		99 HUOJU RD. SUZHOU NEW DISTRICT 215009 P.R.CHINA		GENERAL TOLERANCE					
				CUSTOMER NUMBER					
				DESIGN		JACKIE		JUN-28-18	
				CHECKED		MARK		Nov-22-17	
				APPROVED		JAMES		Nov-22-17	
				DOCUMENT NUMBER		PART VERSION		DOCUMENT VERSION	
				SW0169N		P01		P2	
				ITEM		TX14025-001(CLIP)		P2	
						MOD		DATE	
								NAME	

.X± 0.15	
.XX± 0.10	
.XXX± 0.05	
X.*± 5°	