

TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX



Features:

- 2G / 3G / 4G MiMo
- Global LTE Bands:
 - B1-B23, B25-B29, B33-B42
 - N.A.; Europe, Asia (incl. Jap.)
- GNSS (GPS, Glonass)
- · Single device
 - Guaranteed Port-to-Port Isolation
- Foldable for tight spaces

Applications:

- Challenging RF Environments Demanding:
 - Highest Peak Gain
 - Lowest ECC (Envelope Correlation Coeff.).
- Matched to Radio Modules from:
 - Sierra Wireless, Telit, Huawei, Gemalto, uBlox, ZTE, and others.
- · Security, Video, Graphics
- IoT, SmartGrid, Meters, Remote Monitoring, Sensor Networks
- Transportation, Tracking



All dimensions are in mm / inches

Issue: 2435

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

ELECTRICAL SPECIFICATIONS

LTE1 & LTE2:

Frequency 698-960/1427.9-1510.9/1559-1610/

1695-2200/2300-2700/3400-3600 MHz

Nominal Impedance 50Ω

Return loss(698-960MHz) -6dB

Return loss(1427.9-1510.9/1559-1610/

1695-2200/2300-2700/3400-3600MHz) -7.5dB

Isolation(698-960MHz) -10dB

Isolation(1427.9-1510.9/1559-1610/

1695-2200/2300-2700/3400-3600MHz) -13dB

Average Total Efficiency (698-960MHz) 55%

Average Total Efficiency (1427.9-1510.9MHz) 60%

Average Total Efficiency (1559-1610MHz) 60%

Average Total Efficiency (1695-2200MHz) 65%

Average Total Efficiency (2300-2700MHz) 70%

Average Total Efficiency (3400-3600MHz) 65%





TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

ELECTRICAL SPECIFICATIONS

Peak Gain (698-960MHz)	2.9dBi
Peak Gain (1427.9-1510.9MHz)	1.7dBi
Peak Gain (1559-1610MHz)	1.8dBi
Peak Gain (1695-2200MHz)	3.4dBi
Peak Gain (2300-2700MHz)	3.8dBi
Peak Gain (3400-3600MHz)	4.2dBi
GNSS:	
Frequency	1570-1610MHz
Nominal Impedance	50Ω
Return loss (1570-1610MHz)	-10dB
Average Total Efficiency (1570-1610MHz)	35%
Peak Gain (1570-1610MHz)	0.8dBi
Radiation Pattern	Omni
Polarization	Linear
Power withstanding	3W
Connector type	U.FL compatible
Cable type	Low loss Φ1.13mm Coaxial Cable

(*) All RF parameters measured on 2mm thick PC plate





TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

Color Black

Weight 4.0 g

Cable type OD 1.13mm coax cable

Cable length 300mm

Connector U.FL compatible

Fixing system Adhesive 3M467

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+85 ° C






TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

MECHANICAL DRAWING

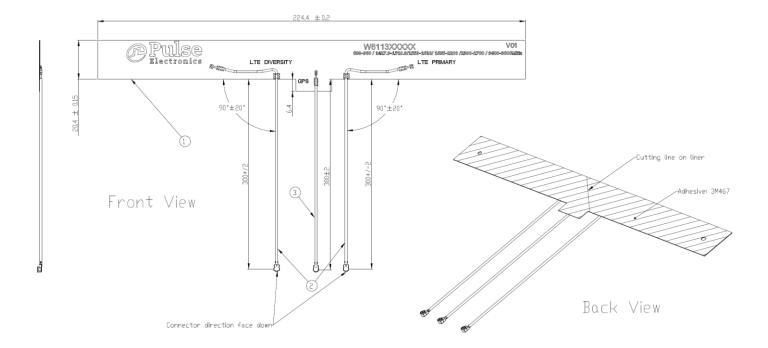





TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

Item	Part Number	Cable length "A" (mm/inch)
1	W6113B0100	100/3.94
2	W6113B0130	130/5.12
3	W6113B0300	300/11.81



TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC


ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

Return Loss [dB]

LTE1 & LTE2 Return Loss

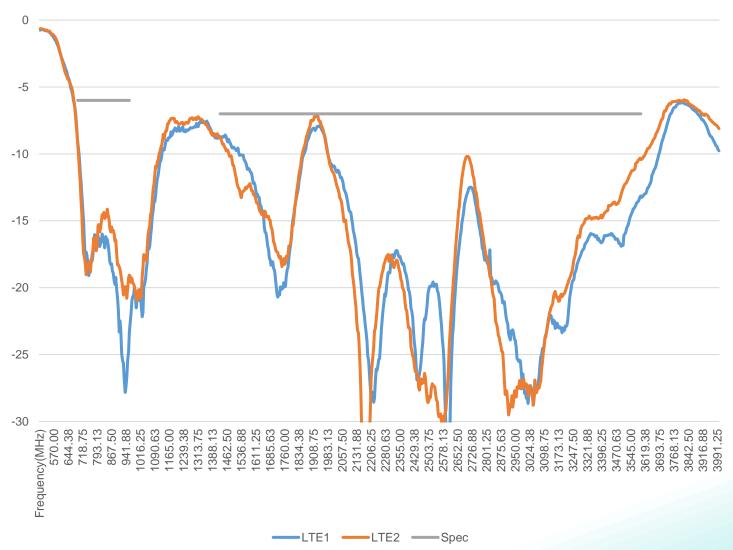

Note: All test results measured with 300mm cable length

Issue: 2435





TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

Return Loss [dB]

GNSS Return Loss



Note: All test results measured with 300mm cable length

Issue: 2435



TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC


ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

Isolation [dB]



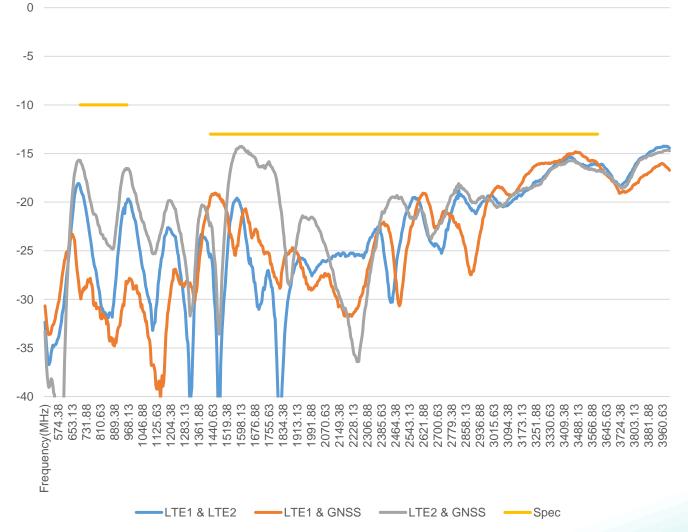

Note: All test results measured with 300mm cable length

Issue: 2435





TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

Efficiency(%)

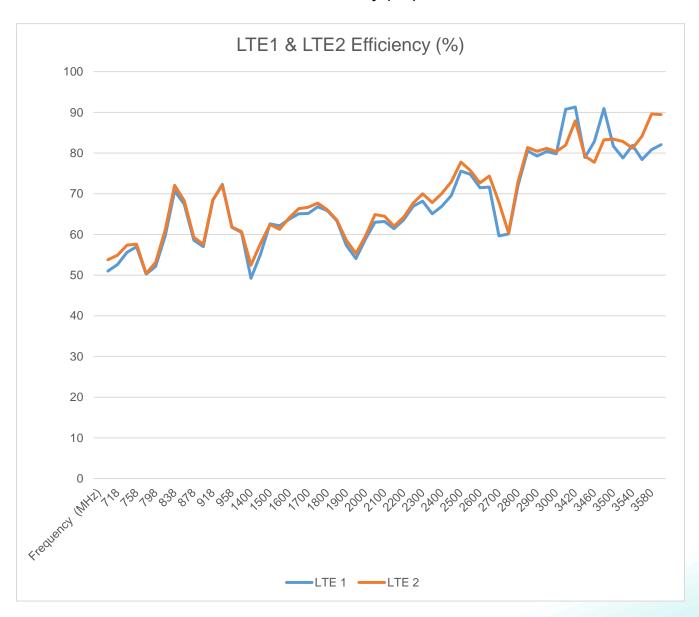

Note: All test results measured with 300mm cable length

Issue: 2435

ROHS



TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

Efficiency(%)

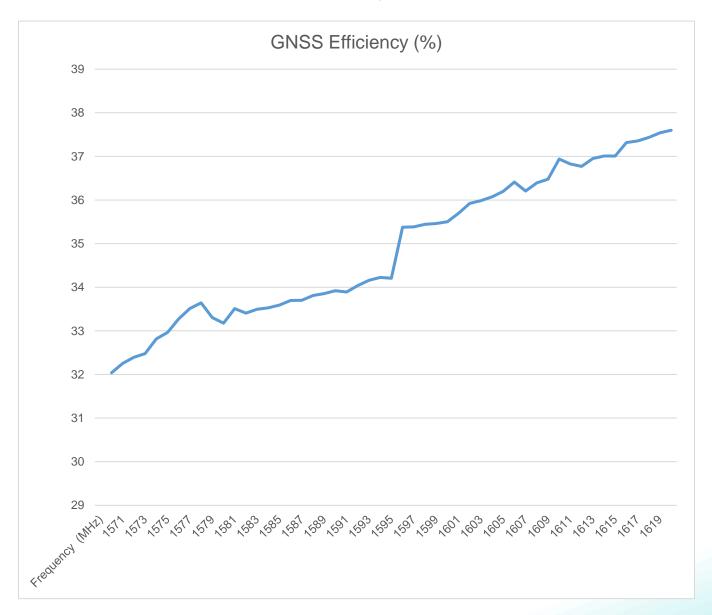

Note: All test results measured with 300mm cable length

Issue: 2435



TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

Peak Gain(dBi)

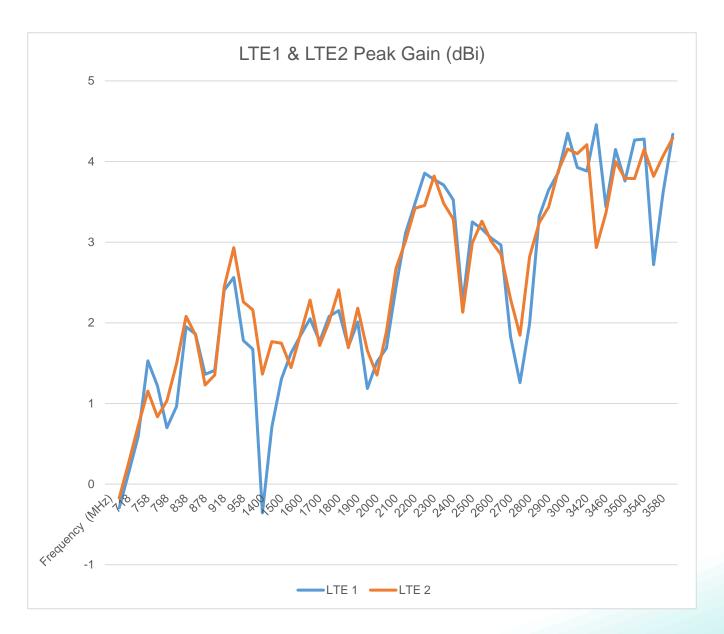

Note: All test results measured with 300mm cable length

Issue: 2435



TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

Peak Gain(dBi)

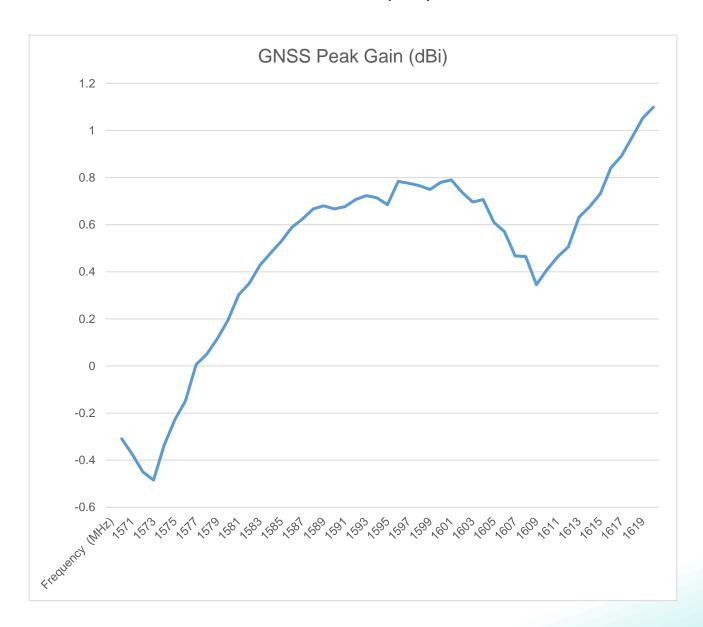

Note: All test results measured with 300mm cable length







TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

ECC

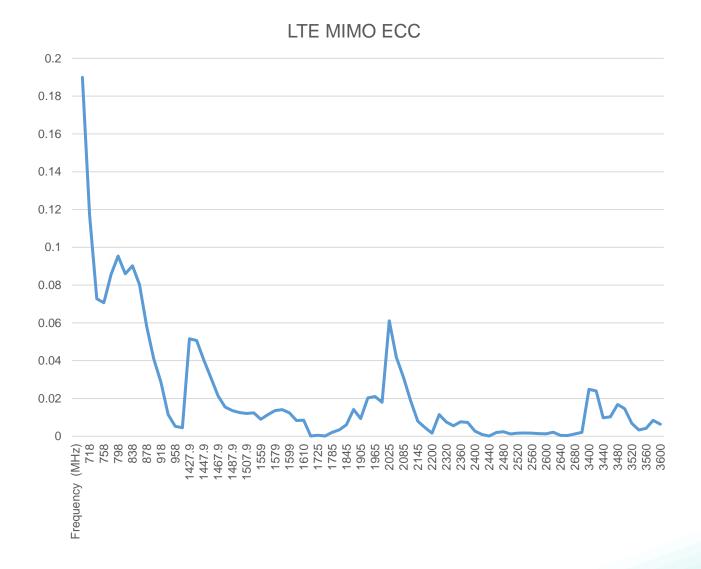

Note: All test results measured with 300mm cable length







TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

LTE1 & LTE2 radiation pattern 698-960MHz (800MHz)

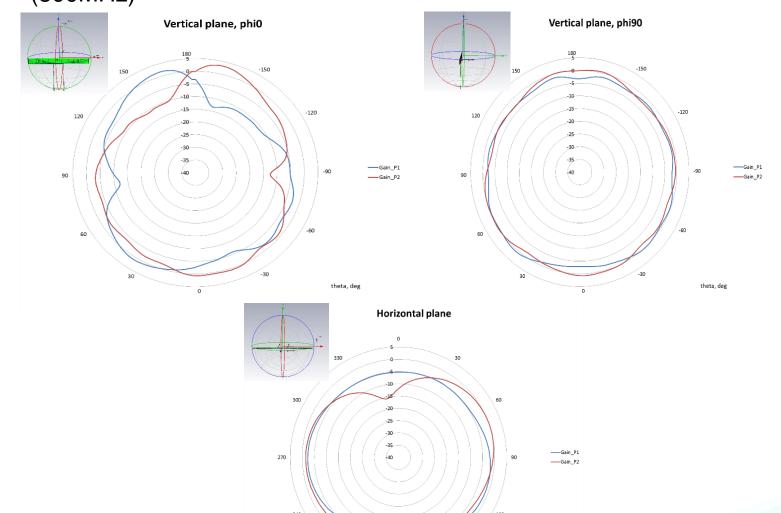

Note: All test results measured with 300mm cable length

Issue: 2435

ROHS



TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

LTE1 & LTE2 radiation pattern 1427.9-1510.9MHz (1450MHz)

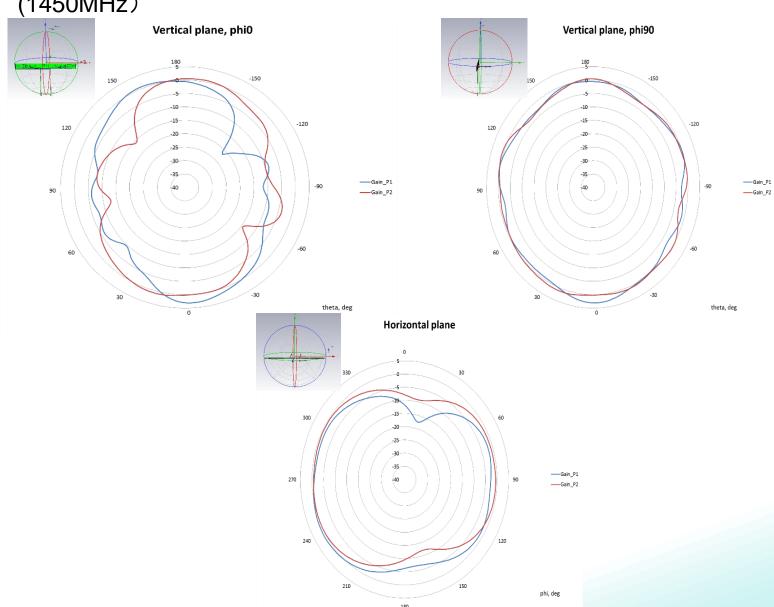

Note: All test results measured with 300mm cable length

Issue: 2435





TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

LTE1 & LTE2 radiation pattern 1559-1610MHz (1570MHz)

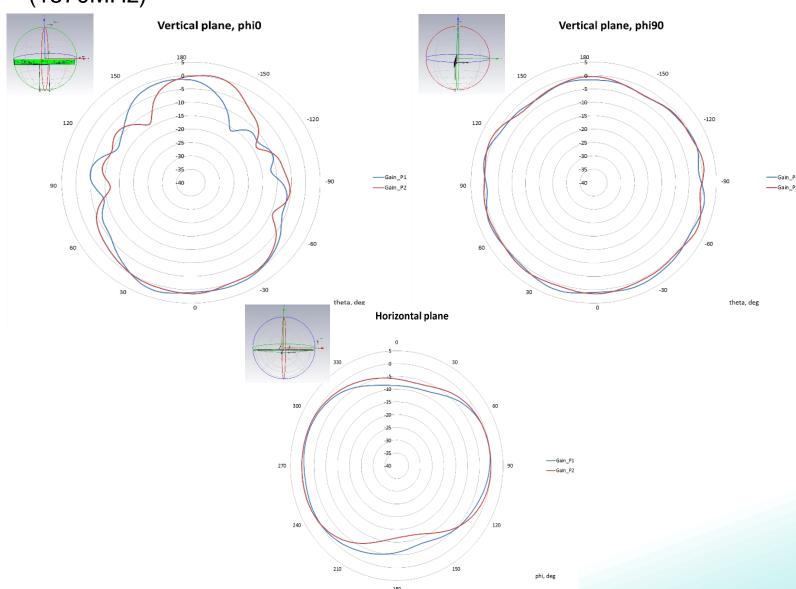

Note: All test results measured with 300mm cable length

Issue: 2435





TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC


ANTENNA


PART NUMBER: W6113XXXXX

CHARTS

LTE1 & LTE2 radiation pattern 1695-2200MHz

(1930MHz)

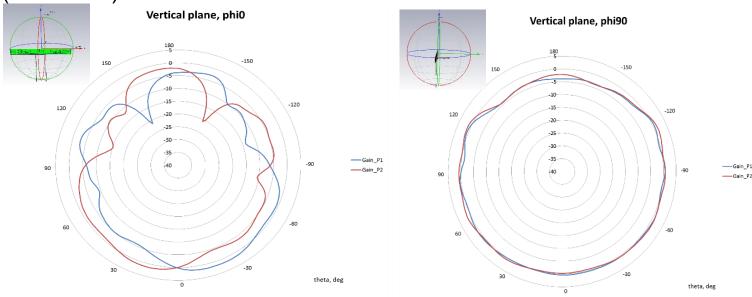

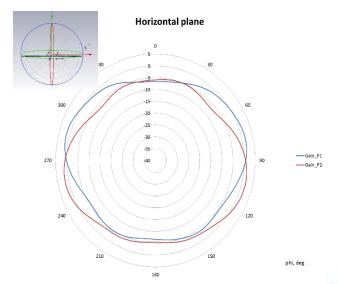

Note: All test results measured with 300mm cable length

Issue: 2435





TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

LTE1 & LTE2 radiation pattern 2300-2700MHz (2390MHz)

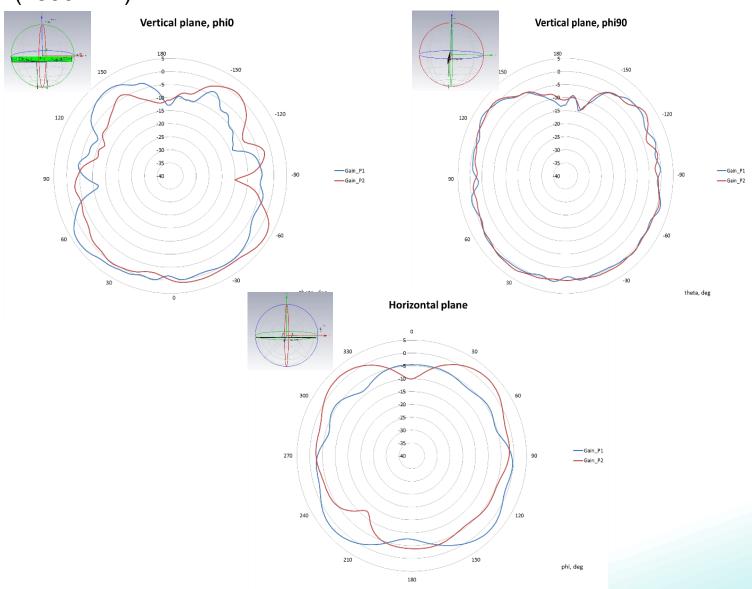

Note: All test results measured with 300mm cable length

Issue: 2435





TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

LTE1 & LTE2 radiation pattern 3400-3600MHz (3400MHz)

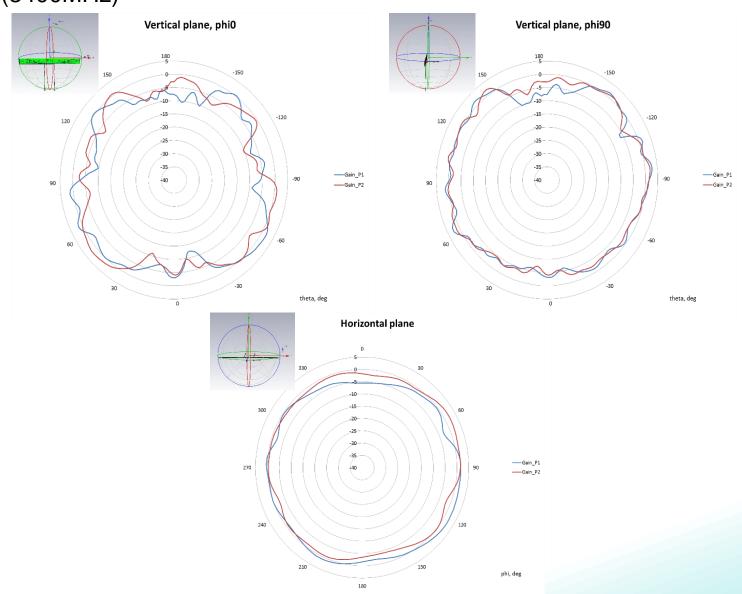

Note: All test results measured with 300mm cable length

Issue: 2435





TECHNICAL DATA SHEET


Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

CHARTS

GNSS radiation pattern 1570-1610MHz (1575MHz)

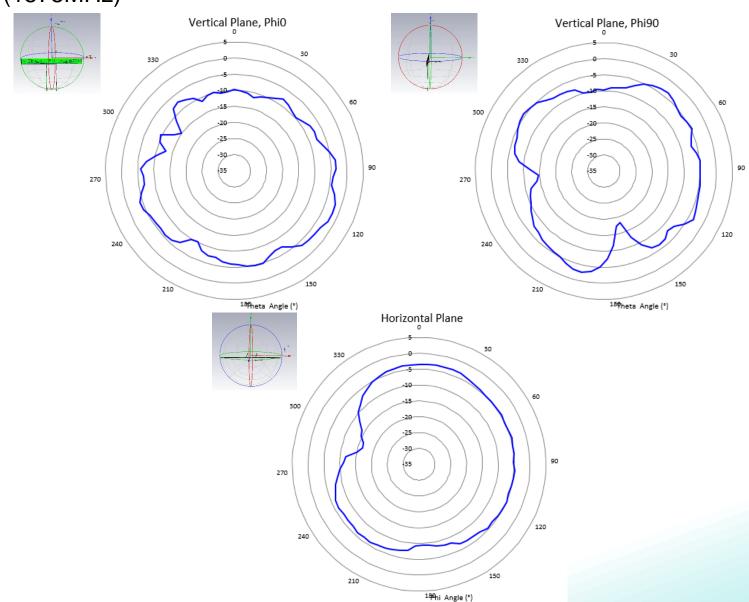

Note: All test results measured with 300mm cable length

Issue: 2435

e necessary.





TECHNICAL DATA SHEET

Description: 2x2 MIMO LTE + GNSS FPC

ANTENNA

PART NUMBER: W6113XXXXX

PACKAGING

5PCS/PE bag 400 PE bag/foam bag 2 foam bag/ carton box

Total 4000PCS/Carton box



