

Description:

SMD 22x6x1.9 GPS&GLONASS Active Antenna

PART NUMBER: ANT8010JLC1B1516A

Features:

- Size: 22.0x6.0x1.9 mm
- Support GPS & GLONASS system
- High radiation efficiency
- Integrated LNA
- Flexible cable/connector option
- RoHS compliant

Applications:

- Tablet
- Navigation device
- Telematics box
- Tracker

Ceramic Patch Antenna ELECTRICAL SPECIFICATIONS

Description
Dimension
Centre Frequency
Bandwidth

Gain

VSWR

Polarization

Efficiency

VALUE 8.0×1.0×1.0 mm³ 1575 - 1602 MHz

1575 - 1602 MHz

75 MHz (Typ.)

GPS 1575 MHz : 3.62 dBi (Typ.) GLONASS 1602 MHz : 3.71 dBi (Typ.)

2.0 Max.

Linear Polarization

GPS 1575 MHz : 57.72%

GLONASS 1602 MHz: 57.59%

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

RoHS

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and rederal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



Description:

SMD 22x6x1.9 GPS&GLONASS Active Antenna

PART NUMBER: ANT8010JLC1B1516A

LNA ELECTRICAL SPECIFICATIONS

Description VALUE 1575 MHz & 1602 MHz **Centre Frequency** 1575 MHz: 20.7 ± 1 dB Gain 1602 MHz: 20.7 ± 1 dB **Output VSWR** 2.0 (Max.) 1575 MHz: 1.86 dB (Typ.) **Noise Figure** 1602 MHz: 1.97 dB (Typ.) 40dB min 1.0 ~ 960MHz 20dB min 1427~1463MHz **SAW Filter** 20dB min 1710~1785MHz (Out of Band Attenuation) 25dB min 1850~1980MHz 40dB min 2401~2483MHz **Supply Voltage** 3.0 + 0.3V**Current Consumption** 3.6 mA (Typ.) **Power Consumption** 15.0 mW (Typ.) **Output Impedance** 50Ω **Operating Temperature** -30 ~ +85 °C **Humidity** < 95%.

NOTE

Storage Temperature

- 1. Based on 22*6 mm² ground plane (with customer's housing)
- 2. Centre frequency will be offset to working frequency while changes of customer's housing and ground plane.
- 3. Please contact local sales if you need customized design to gain optimum antenna performance.

-40 ~ +125 °C





Description:

SMD 22x6x1.9 GPS&GLONASS Active Antenna


PART NUMBER: ANT8010JLC1B1516A

ELECTRICAL SPECIFICATIONS

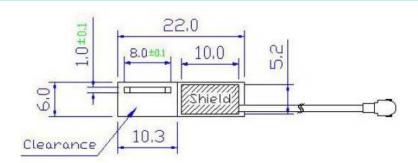

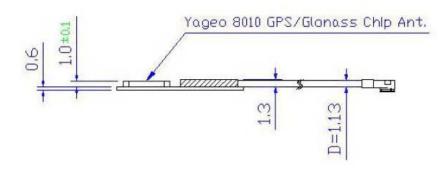

Length	22.0 +/- 0.2 mm	
Width	6.0 +/- 0.2 mm	
Thickness	1.9 ~ 2.1 mm	
Cable	Diameter= 1.13 mm; Length=	
Connector	I-PEX 20428	
Shielding Case	10 × 5.2 × 1.3 mm³	









Description:

SMD 22x6x1.9 GPS&GLONASS Active Antenna

PART NUMBER: ANT8010JLC1B1516A

ELECTRICAL SPECIFICATIONS

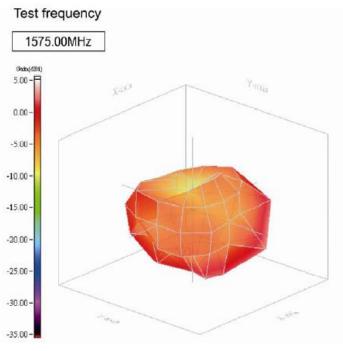

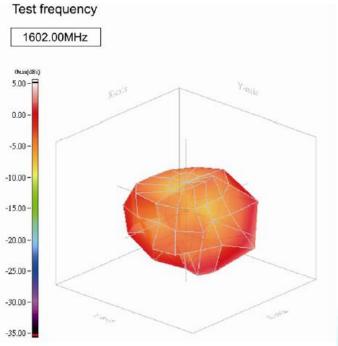

Radiation pattern

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Revision Version 1

TECHNICAL DATA SHEET

Description:

SMD 22x6x1.9 GPS&GLONASS Active Antenna

PART NUMBER: ANT8010JLC1B1516A

REVISION HISTORY		
Date	Description	
Nov. 23. 2020	- New issue	