

Description: 1608 5GHz Balun

PART NUMBER: BLN1608LL01R5000A

Features:

- Compact size : 1.6x0.8x0.65mm
- RoHS compliant

Applications:

- WLAN, 802.11a/b/g/n
- ISM Band

ELECTRICAL SPECIFICATIONS

DESCRIPTION	Value
Pass Band	4900~5950 MHz
Unbalanced Impedance	50 Ω
balanced Impedance	100 Ω
Insertion Loss	1.2 dB (Max) at 25 °C 1.5 dB (Max.) at -40 ~ 85°C
V.S.W.R / Return Loss	2.0(Max) / 10 dB (Min.)
Phase Difference	180 ±10 degree
Amplitude Difference	1.5 dB (Max)

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel:1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg,4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998




Description: 1608 5GHz Balun

PART NUMBER: BLN1608LL01R5000A

MECHANICAL DIMENSION

Outline

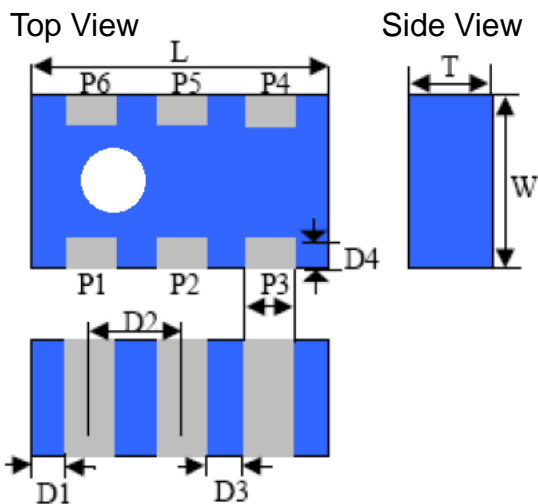

Termination

Terminal name	function
P1	Unbal. Port
P2	GND
P3	Balanced Port
P4	Balanced Port
P5	GND
P6	Not Connect


Mechanical

	Dimension
L (mm)	1.60 ±0.15
W (mm)	0.80 ±0.15
T (mm)	0.65 ±0.15
P1 (mm)	0.30 ±0.15
P2 (mm)	0.30 ±0.15
P3 (mm)	0.30 ±0.15
P4 (mm)	0.30 ±0.15
P5 (mm)	0.30 ±0.15
P6 (mm)	0.30 ±0.15
D1 (mm)	0.10 ±0.05
D2 (mm)	0.55 ±0.15
D3 (mm)	0.25 ±0.15
D4 (mm)	0.20 ±0.15

Description: 1608 5GHz Balun

PART NUMBER: BLN1608LL01R5000A


Reference design of EVB

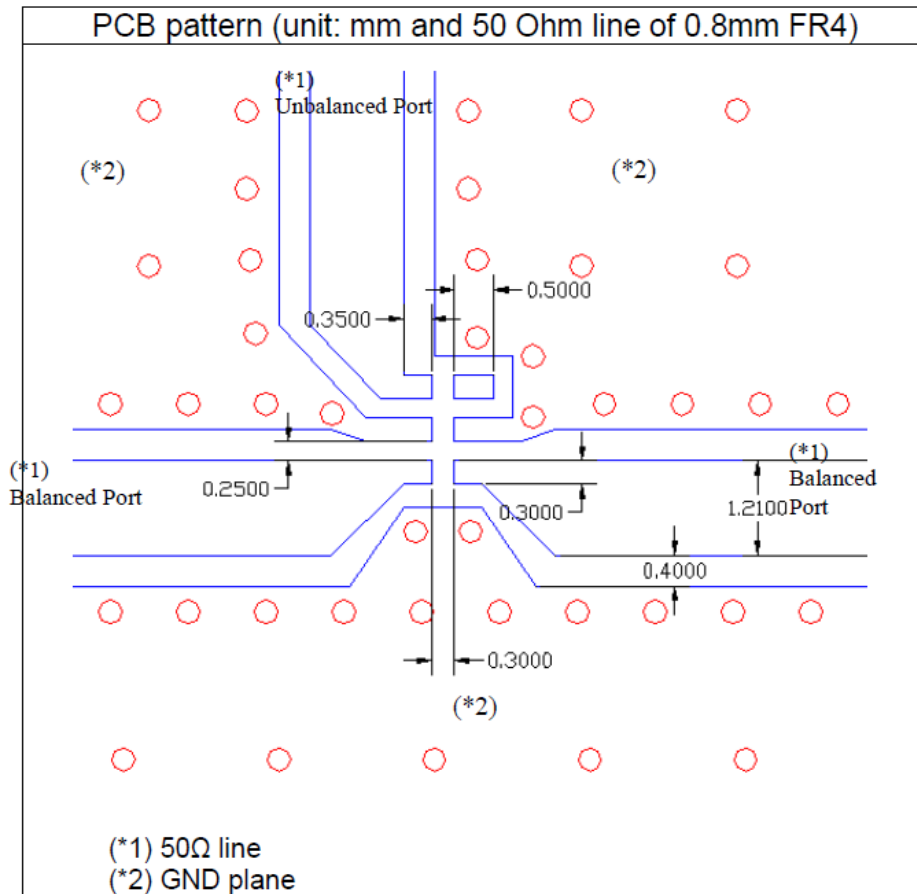

Description: 1608 5GHz Balun

PART NUMBER: BLN1608LL01R5000A

ELECTRICAL PERFORMANCES

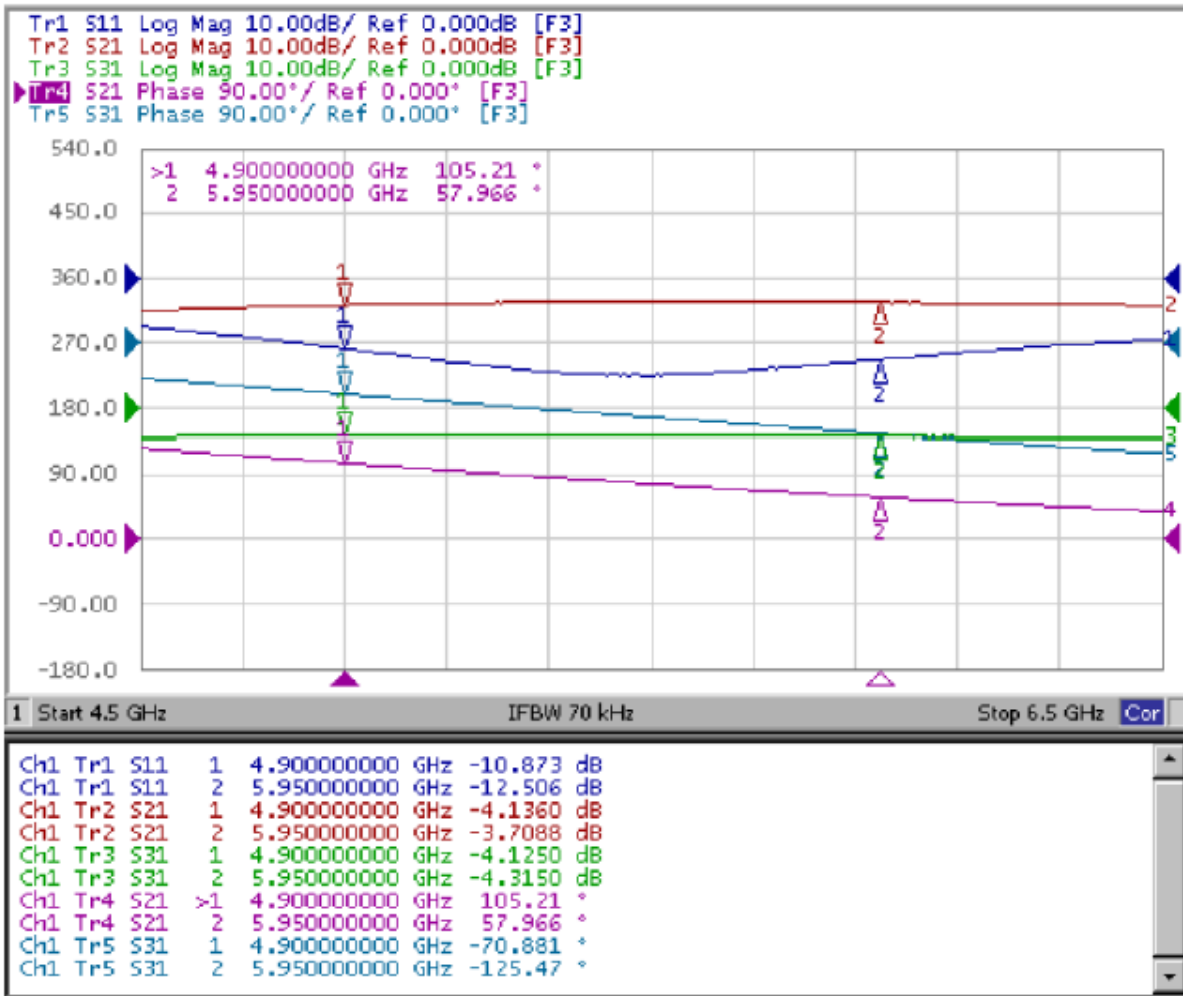


- S11, S21, S31 Measured on Agilent E5071b Network Analyzer

Frequency Characteristics

Description: 1608 5GHz Balun

PART NUMBER: BLN1608LL01R5000A

ELECTRICAL PERFORMANCES

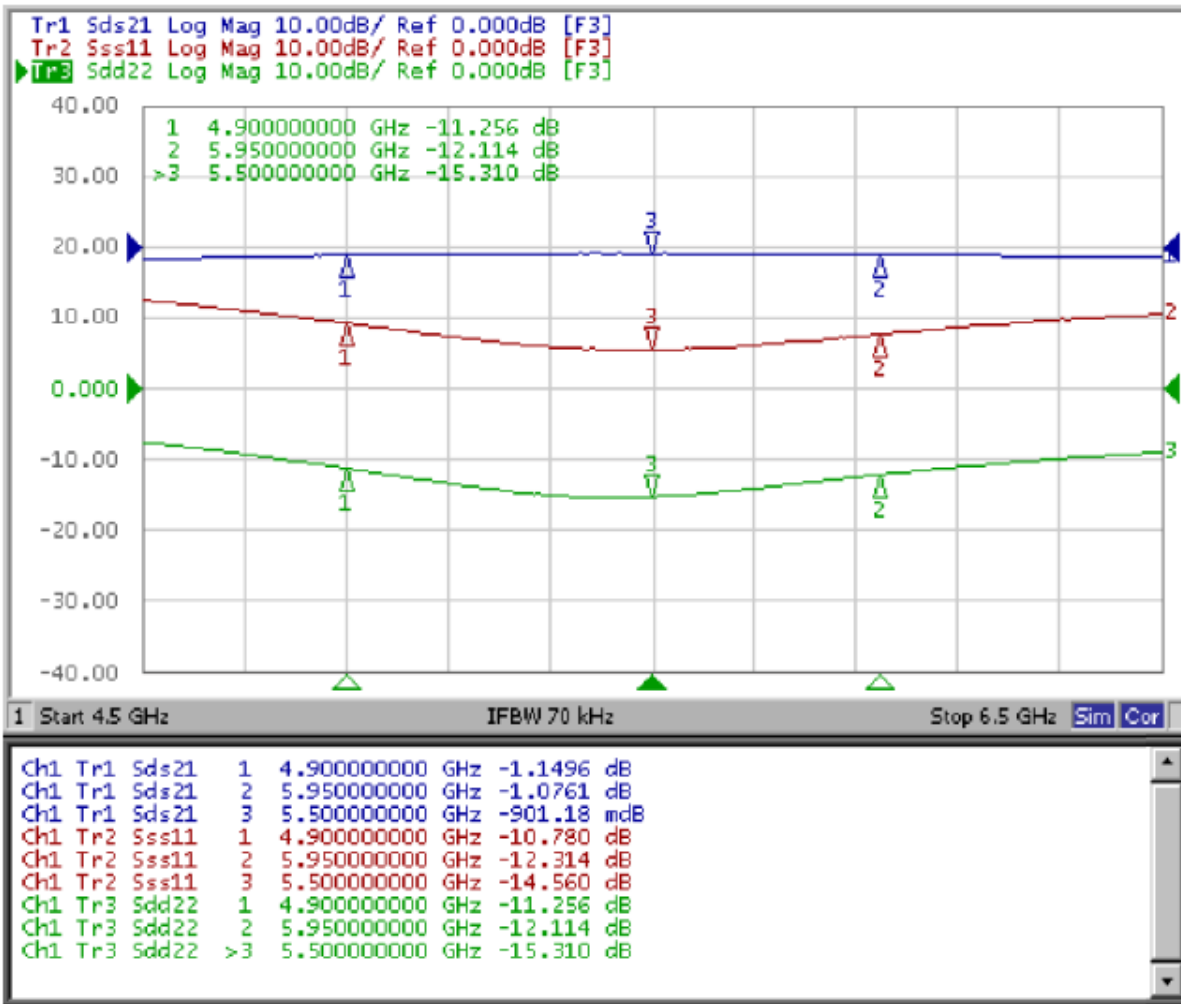


- Insertion loss (Sds21, differential port to single-ended port)
- Unbalanced port return loss (Sss11, single-ended port)
- Balanced port return loss (Sdd22, differential port)
- Measured on Agilent E5071b Network Analyzer

Frequency Characteristics

Description: 1608 5GHz Balun

PART NUMBER: BLN1608LL01R5000A

ELECTRICAL PERFORMANCES

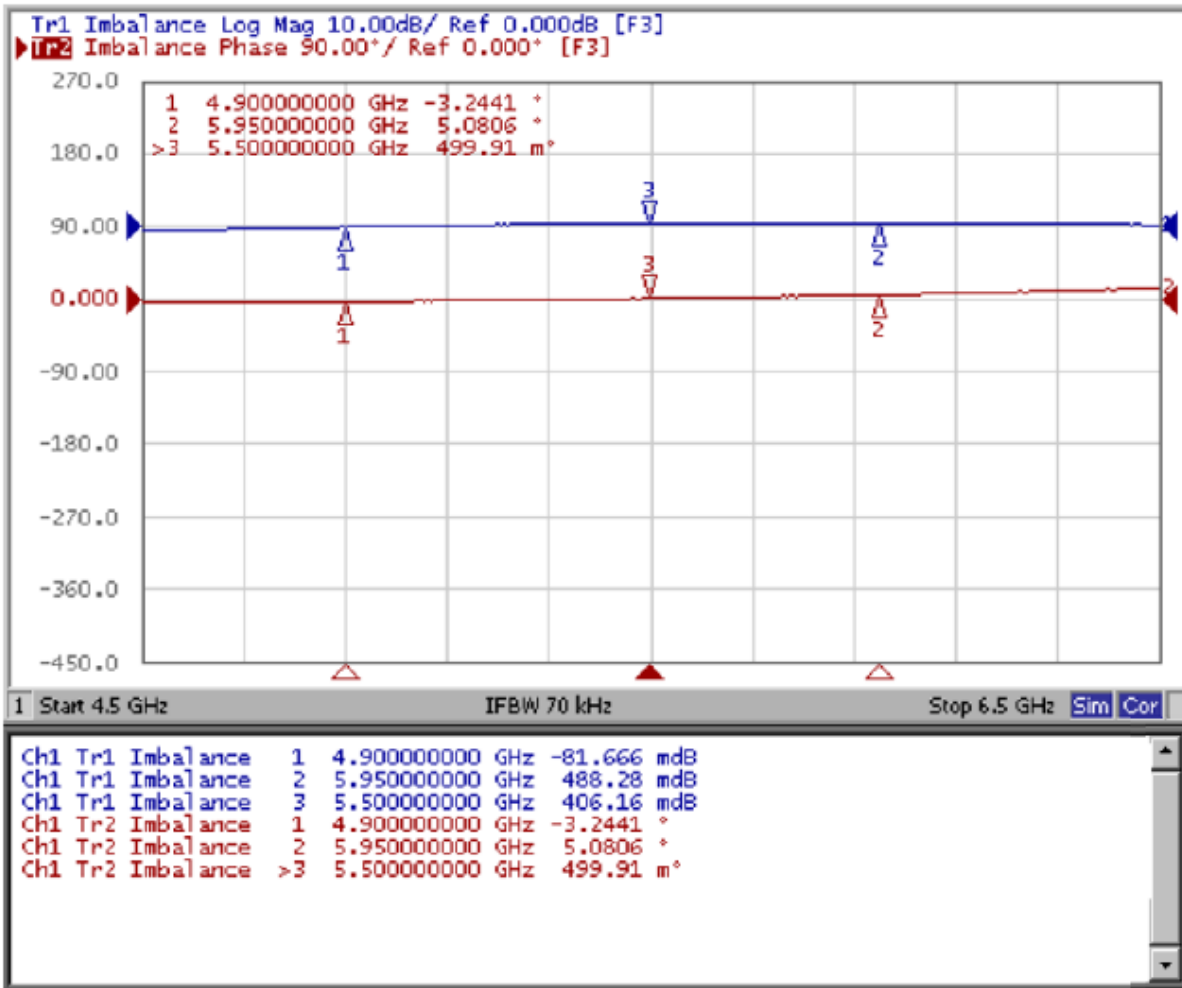

- Imbalance (S21/S31 amplitude and phase difference)
- Measured on Agilent E5071b Network Analyzer

Frequency Characteristics

Description: 1608 5GHz Balun

PART NUMBER: BLN1608LL01R5000A

REVISION HISTORY

Revision	Date	Description
Version 1	June. 01, 2021	- New issue for Pulse version