

Description: 1608 Low Pass Filter

PART NUMBER: LPF1608LKRKR0709L

Features:

Applications:

· Compact size

RoHS compliant

• GSM/WCDMA/LTE



Net weigh/pcs (g): 0.0038

ELECTRICAL SPECIFICATIONS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Insertion Loss (dB)	617~960	-	0.22	0.3
Return Loss (dB)	617~960	10	22.5	-
	1738~1920	25	28.2	-
Attenuation (dB)	2400~2500	25	42.3	-
	2600~2980	25	39.3	-

Operating Temperature Range: -40~85°C

Power Capacity: 3W max.

ootod b

ROHS

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



Description: 1608 Low Pass Filter

PART NUMBER: LPF1608LKRKR0709L

MECHANICAL DIMENSION


Outline

Top View

Dimension


L	W	T	a1
1.60±0.10	0.80±0.10	0.60±0.10	0.65±0.10
a2	a3	a4	e1
0.225±0.05	0.22±0.05	0.40±0.05	0.21±0.05
e2			
0.30±0.05			


NOTE: Dimensions in mm.

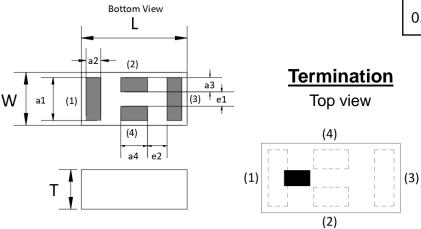

Terminal name	Function		
1	Input / Output		
2	GND		
3	Output / Input		
4	GND		

Reference design of EVB

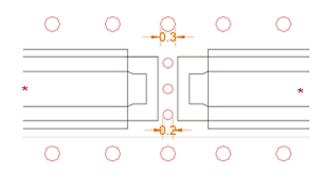

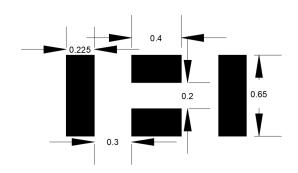

Unit: mm


Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.



Description: 1608 Low Pass Filter


PART NUMBER: LPF1608LKRKR0709L

MEASURING DIAGRAM



Test Instrument:
Agilent E5071C Network Analyzer or equivalent.

ELECTRICAL PERFORMANCES

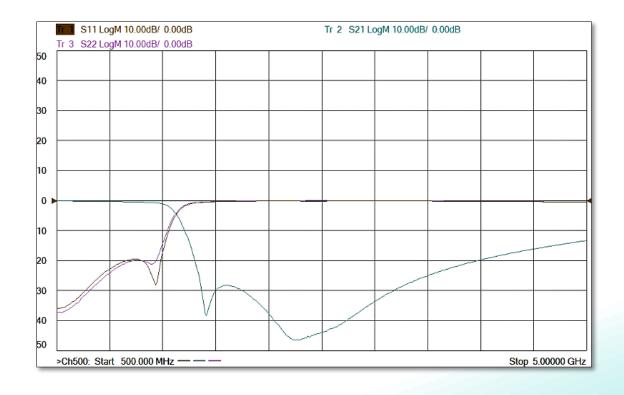





Description: 1608 Low Pass Filter

PART NUMBER: LPF1608LKRKR0709L

PACKING SPECIFICATION


Peel-off force

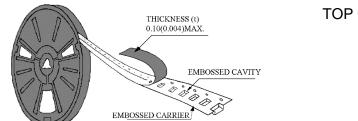

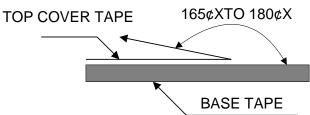

The force for peeling of cover tape is 10 grams in the arrow direction.


Dimension (Unit: mm)



TYPE	A	В	С	D	E	F
8 mm	178±1	60+0.5 -0	1	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

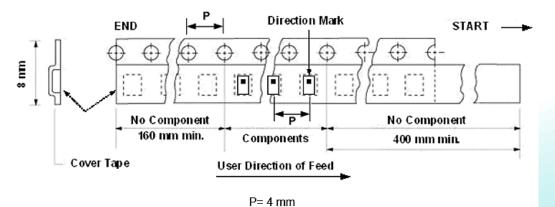

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 1608 Low Pass Filter

PART NUMBER: LPF1608LKRKR0709L

		TORY

RevisionDateDescriptionVersion 1Feb. 23, 2023- New issue

