

Description: 2012 0.8G&2.0GHz Low Pass Filter

PART NUMBER: LPF2012LM59RWPENA

Features:

- Compact size : 2.00x1.25x0.90mm
- RoHS compliant

Applications:

- WWAN, Penta-Band

ELECTRICAL SPECIFICATIONS

DESCRIPTION	Value
Pass Band	800~2025 MHz
Impedance	50Ω
Insertion Loss	0.37 dB typ. ,0.5 dB(Max) at 800-1000 MHz(-40~85°C) 0.70 dB typ. ,0.8 dB(Max) at 1700-1910 MHz(-40~85°C) 1.30 dB typ. ,1.5 dB(Max) at 2010-2025 MHz(-40~85°C)
V.S.W.R	2.0(Max)
Attenuation	20dB Min @ 2.3~3.7GHz 30dB Min @ 3.7~4.1GHz 20dB Min @ 4.1~6.1GHz 10dB Min @ 6.1~8.1GHz
Operating Temperature	-40 ~ 85°C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:



Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel:1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0


Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg,4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998

Description: 2012 0.8G&2.0GHz Low Pass Filter

PART NUMBER: LPF2012LM59RWPENA

MECHANICAL DIMENSION

Outline

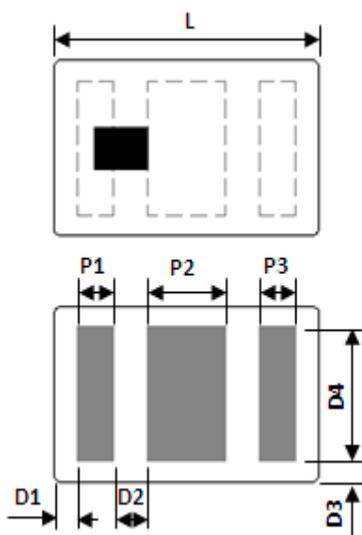


Termination

Terminal name	function
P1	Input
P2	GND
P3	Output

Mechanical

	Dimension
L (mm)	2.00 ±0.15
W (mm)	1.25 ±0.10
T (mm)	0.90 ±0.10
P1 (mm)	0.28 ±0.10
P2 (mm)	0.60 ±0.10
P3 (mm)	0.28 ±0.10
D1 (mm)	0.17 ±0.10
D2 (mm)	0.25 ±0.10
D3 (mm)	0.15 ±0.10
D4 (mm)	0.95 ±0.10

Reference design of EVB

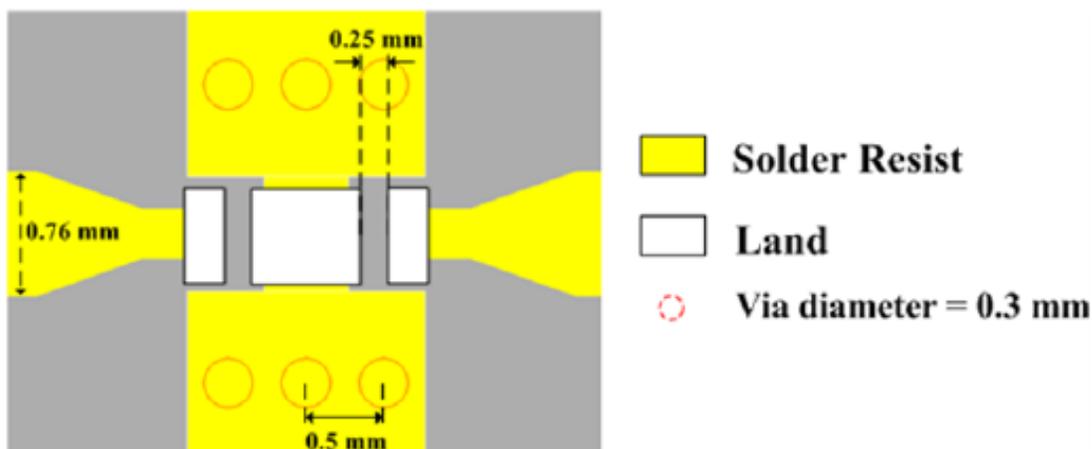

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.
CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 0.8G&2.0GHz Low Pass Filter

PART NUMBER: LPF2012LM59RWPENA

ELECTRICAL PERFORMANCES



- Measured on Agilent E5071C Network Analyzer
- Input port : Port 1 (Return loss : S11)
- Output port : Port 3 (Return loss : S33)
- Insertion loss : S31

Ch1	Tr1	S31	>1	1.0000000	GHZ	-0.4340	dB	Ch1	Tr2	S11	1	800.00000	MHZ	-10.995	dB
Ch1	Tr1	S31	2	1.7000000	GHZ	-0.3525	dB	Ch1	Tr2	S11	2	1.0000000	GHZ	-10.983	dB
Ch1	Tr1	S31	3	1.9100000	GHZ	-0.6951	dB	Ch1	Tr2	S11	3	1.7000000	GHZ	-17.438	dB
Ch1	Tr1	S31	4	2.0100000	GHZ	-0.9492	dB	Ch1	Tr2	S11	4	1.9100000	GHZ	-13.713	dB
Ch1	Tr1	S31	5	2.0250000	GHZ	-1.0901	dB	Ch1	Tr2	S11	5	2.0100000	GHZ	-22.260	dB
Ch1	Tr1	S31	6	2.3000000	GHZ	-26.036	dB	Ch1	Tr2	S11	6	2.0250000	GHZ	-19.476	dB
Ch1	Tr1	S31	7	3.4000000	GHZ	-39.036	dB								
Ch1	Tr1	S31	8	3.8200000	GHZ	-35.848	dB								
Ch1	Tr1	S31	9	6.1000000	GHZ	-28.447	dB								

Frequency Characteristics

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 0.8G&2.0GHz Low Pass Filter

PART NUMBER: LPF2012LM59RWPENA

REVISION HISTORY

Revision	Date	Description
Version 1	Oct. 06, 2020	- New issue