

TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

### **Features:**

- Small form factor monopole
- Antenna size W x L x H
  W1900/W1902 (18.4 x 8.0 x 49.5mm)
- Lead free materials
- RoHS Compliant Product
- Connector Type: W1900 SMA (male) W1902 RP-SMA (male)

# **Applications:**

- Penta band EU/US GSM/WCDMA
- Frequency range:
  850 / 900 / 1800 / 1900/ 2100 MHz
- M2M Applications

#### All dimensions are in mm

#### Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998








TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

### **ELECTRICAL SPECIFICATIONS**

Frequency	824-960MHz
	1710-2170MHz
Nominal Impedance	50Ω
Return Loss	-4dB 824-960MHz
	-6dB 1710-2170MHz
Peak Gain	1dBi 824-960MHz
	2dBi 1710-2170MHz
Efficiency	52%
Radiation Pattern	Omni
Polarization:	Linear
Power withstanding	5W

#### Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



2



TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

# Series: Stubby Antenna

### **MECHANICAL SPECIFICATIONS**

Weight Antenna Color / Material Connector type W1900/W1902 11.07g Black W1900 SMA(Male) W1902 RP-SMA(Male)

### **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature Storage Temperature Wind-loading Ingress Protection RoHS Compliant -30/+75 ° C -30/+75 ° C 100km/h IP52 Yes

Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION




3




TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

### **MECHANICAL DRAWING**

W1900/W1902

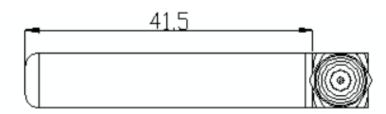

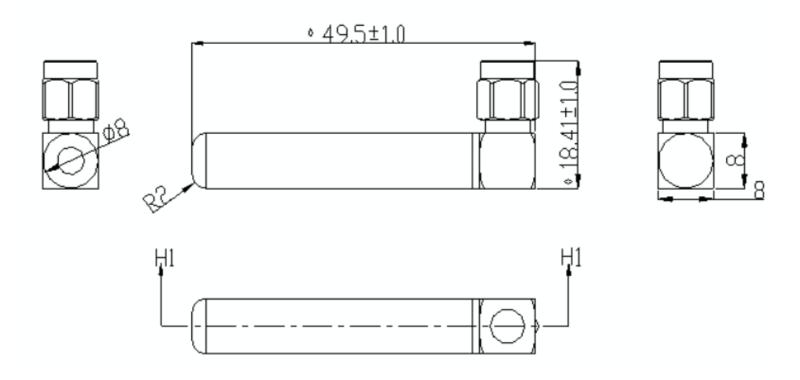

#### Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION




4



TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

### CHARTS

# **Return Loss**

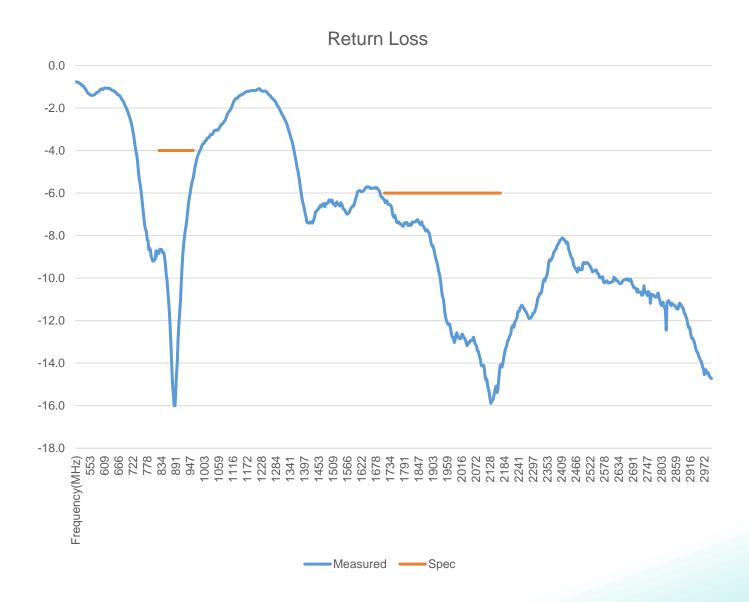

#### Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


5



TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

### CHARTS

# Efficiency(%)

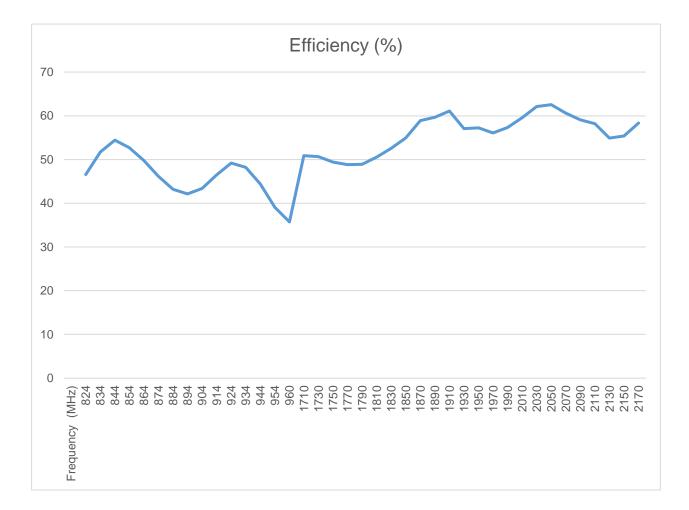

#### Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION


6



TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

### CHARTS

# Peak Gain (dBi)

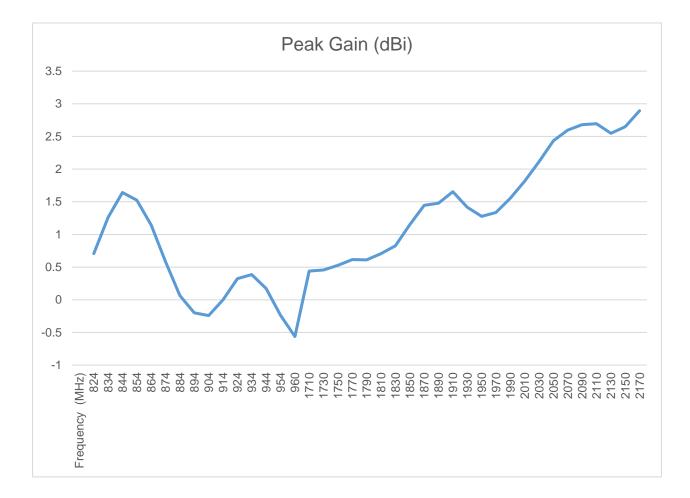

#### Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

7




TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

#### **CHARTS**

# Free Space Radiation Pattern

Elevation Plane

Horizontal Plane

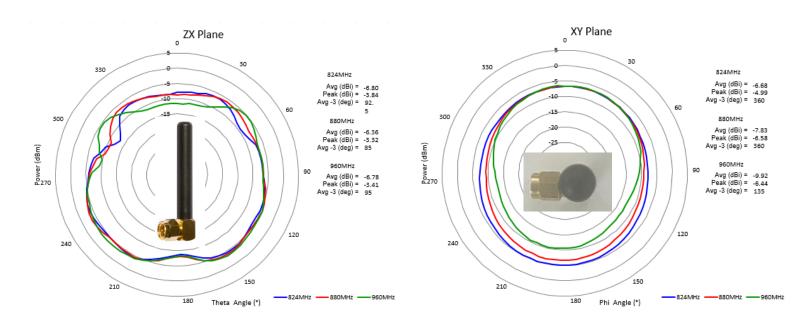

#### Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8




TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

#### **CHARTS**

# Free Space Radiation Pattern

**Elevation Plane** 

Horizontal Plane

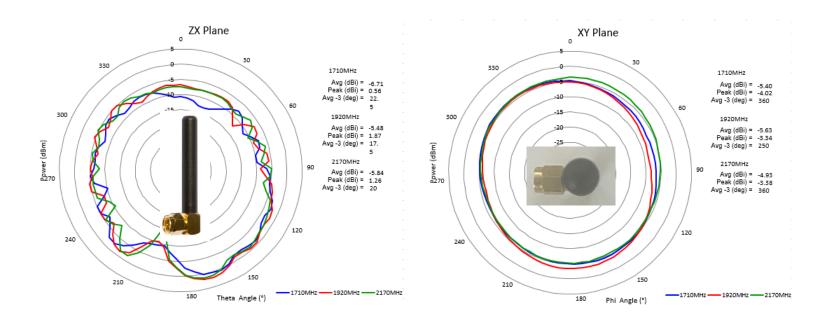

#### Issue: 2443

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



9



TECHNICAL DATA SHEET Description: 3G Pentaband 824-2170MHz, Right angle PART NUMBER: W1900/W1902

### PACKAGING

1pcs antenna per PE bag

18pcs PE bags per tray

14pcs trays per package box (2pcs empty tray)

216pcs per package box

Package box: 460mm\*235mm\*140mm

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

